

SMART Transmitter Power Supply

KFD2-STC4-Ex1.H

SIL 2

- 1-channel isolated barrier
- 24 V DC supply (Power Rail)
- Input 2-wire and 3-wire SMART transmitters and 2-wire SMART current sources
- Output 0/4 mA ... 20 mA
- Terminals with test points
- High field voltage 17.6 V DC
- Up to SIL 2 acc. to IEC 61508

Input 0/4 mA ... 20 mA Output 0/4 mA ... 20 mA



Function

This isolated barrier is used for intrinsic safety applications. The device supplies 2-wire and 3-wire SMART transmitters with higher output voltage in a hazardous area, and can also be used with 2-wire SMART current sources. It transfers the analog input signal to the safe area as an isolated current value. Digital signals may be superimposed on the input signal in the hazardous or safe area and are transferred bi-directionally. If the HART communication resistance in the loop is too low, the internal resistance of 250 Ω between terminals 8 and 9 can be used. Test sockets for the connection of HART communicators are integrated into the terminals of the device.

Technical Data

General specifications	
Signal type	Analog input
Functional safety related parameters	
Safety Integrity Level (SIL)	SIL 2
Supply	
Connection	Power Rail or terminals 14+, 15-
Rated voltage	U_r 20 ... 35 V DC
Ripple	within the supply tolerance
Power dissipation	1.5 W
Power consumption	1.9 W
Input	
Connection side	field side
Connection	terminals 1+, 2-, 3 or 5-, 6+
Input signal	0/4 ... 20 mA
Voltage drop	≤ 2.4 V at 20 mA (terminals 5, 6)
Input resistance	≤ 64 Ω terminals 2-, 3 ; ≤ 500 Ω terminals 1+, 3 (250 Ω load)
Available voltage	≥ 17.6 V at 20 mA terminals 1+, 3
Output	
Connection side	control side
Connection	terminals 7-, 8+, 9
Load	0 ... 800 Ω at 20 mA
Output signal	0/4 ... 20 mA (overload > 25 mA)
Ripple	max. 50 μA _{rms}
Transfer characteristics	
Deviation	at 20 °C (68 °F), 0/4 ... 20 mA ≤ 10 μA incl. calibration, linearity, hysteresis, loads and fluctuations of supply voltage

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283692_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0002
pa-info@us.pepperl-fuchs.com

Germany: +49 621 776 2222
pa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

Influence of ambient temperature	0.25 μ A/K	
Frequency range	field side into the control side: bandwidth with 0.5 V _{pp} signal 0 ... 7.5 kHz (-3 dB) control side into the field side: bandwidth with 0.5 V _{pp} signal 0.3 ... 7.5 kHz (-3 dB)	
Settling time	200 μ s	
Rise time/fall time	20 μ s	
Galvanic isolation		
Output/power supply	functional insulation, rated insulation voltage 50 V AC	
Indicators/settings		
Display elements	LED	
Labeling	space for labeling at the front	
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations)	
Conformity		
Electromagnetic compatibility		
Degree of protection	NE 21:2011	
Protection against electrical shock	UL 61010-1:2012	
Ambient conditions		
Ambient temperature	-20 ... 60 °C (-4 ... 140 °F)	
Mechanical specifications		
Degree of protection	IP20	
Connection	screw terminals	
Mass	approx. 200 g	
Dimensions	20 x 124 x 115 mm (0.8 x 4.9 x 4.5 inch) , housing type B2	
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001	
Data for application in connection with hazardous areas		
EU-type examination certificate		
Marking	BAS 99 ATEX 7060 X	
Input	Ⓜ II (1)G [Ex ia Ga] IIC , Ⓜ II (1)D [Ex ia Da] IIIC , Ⓜ I (M1) [Ex ia Ma] I	
Supply	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I	
Maximum safe voltage	U _m	250 V (Attention! The rated voltage can be lower.)
Equipment		
Voltage U _o	terminals 1+, 3-	
Current I _o	27.2 V	
Power P _o	93 mA	
Internal capacitance C _i	632 mW	
Internal inductance L _i	12 nF	
Equipment		
Voltage U _i	terminals 2-, 3	
Current I _i	30 V	
Voltage U _o	117 mA	
Current I _o	3.5 V	
Power P _o	73 mA	
Internal capacitance C _i	64 mW	
Internal inductance L _i	terminals 1+, 2 / 3-	
Voltage U _o	27.2 V	
Current I _o	117 mA	
Power P _o	639 mW	
Internal capacitance C _i	12 nF	
Internal inductance L _i	0 mH	
Equipment		
Voltage U _i	terminals 5-, 6+	
Current I _i	30 V	
Voltage U _o	117 mA	
	8.7 V	

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283692_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0002
pa-info@us.pepperl-fuchs.comGermany: +49 621 776 2222
pa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
pa-info@sg.pepperl-fuchs.com


PEPPERL+FUCHS

Technical Data

Current I_o	0 mA
Internal capacitance C_i	0 nF
Internal inductance L_i	0 mH
Output	
Maximum safe voltage	U_m 250 V (Attention! The rated voltage can be lower.)
Certificate	TÜV 99 ATEX 1499 X
Marking	Ⓜ II 3G Ex nA II T4 [device in zone 2]
Galvanic isolation	
Input/Output	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Input/power supply	safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013 , EN 60079-11:2012 , EN 60079-15:2010
International approvals	
UL approval	
Control drawing	116-0428 (cULus)
IECEX approval	IECEX BAS 04.0016X IECEX CML 15.0055X
Approved for	[Ex ia Ga] IIC, [Ex ia Da] IIIC, [Ex ia Ma] I Ex nA IIC T4 Gc
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .


Assembly

Front view

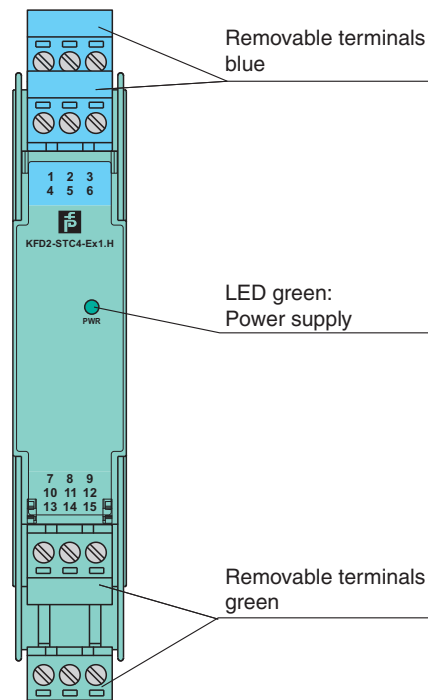

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283692_eng.pdf

Connection

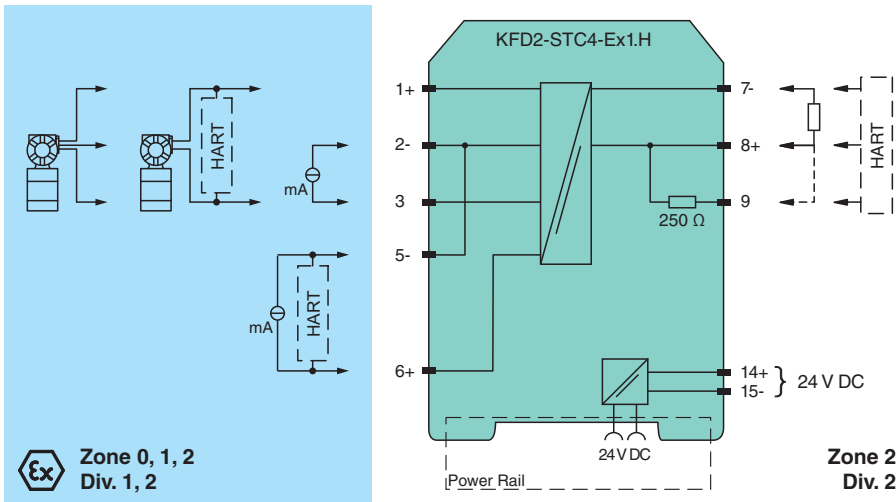

Accessories

	KFD2-EB2	Power Feed Module
	UPR-03	Universal Power Rail with end caps and cover, 3 conductors, length: 2 m
	UPR-03-M	Universal Power Rail with end caps and cover, 3 conductors, length: 1,6 m
	UPR-03-S	Universal Power Rail with end caps and cover, 3 conductors, length: 0.8 m
	K-DUCT-BU	
	K-DUCT-BU-UPR-03	Profile rail with UPR-03- * insert, 3 conductors, wiring comb field side blue

Release date: 2020-04-06 Date of issue: 2020-04-06 Filename: 283692_eng.pdf

Application

The device supports the following SMART protocols:

- HART
- BRAIN
- Foxboro