

MODEL NUMBER

11-11310-00


PRODUCT LINE

GO™ Switch 10/20 Series

SPECIFICATIONS

| | |
|------------------------|----------------------------|
| Model | 11 Model |
| Contact Form | SPDT (Form C) |
| Sensing Range | Standard approx. 3/8" side |
| Outlet Position | Right of sensing area |
| Enclosure Material | Brass w/flat black lacquer |
| Area Classification | CSA/FM CI I, Div 2 |
| Wiring Options | Terminal block - 1/2" NPT |
| Regional Certification | No regional certification |
| Custom Field | |

WIRING DIAGRAM

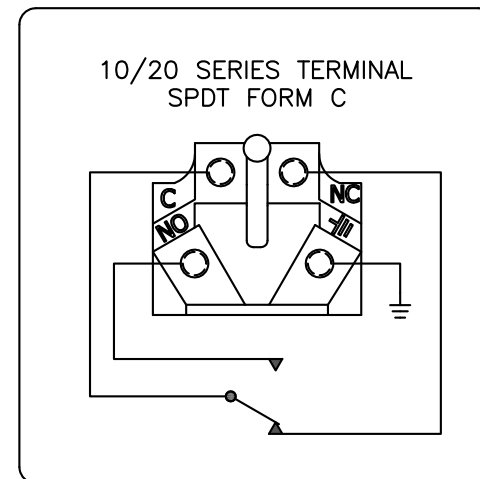

NAMEPLATE



CL I DIV 2, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III;
 T₁:T₄ - 50°C - T₅ - 60°C/80°C
 ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 480VAC/240VDC MAX
 LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.
 CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.

Model #:

Serial #:



www.electrosupply.com
 sales@electrosupply.com
 1-800-663-6576