

**MODEL NUMBER**

11-12310-00


**PRODUCT LINE**

GO™ Switch 10/20 Series

**SPECIFICATIONS**

|                        |                             |
|------------------------|-----------------------------|
| Model                  | 11 Model                    |
| Contact Form           | SPDT (Form C)               |
| Sensing Range          | Extended approx. 9/16" side |
| Outlet Position        | Right of sensing area       |
| Enclosure Material     | Brass w/flat black lacquer  |
| Area Classification    | CSA/FM CI I, Div 2          |
| Wiring Options         | Terminal block - 1/2" NPT   |
| Regional Certification | No regional certification   |
| Custom Field           |                             |

**WIRING DIAGRAM**

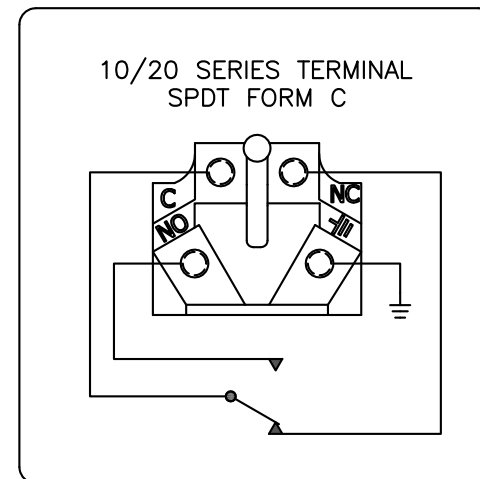

**NAMEPLATE**



CL I DIV 2, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III;  
 T<sub>1</sub>:T<sub>4</sub> - 50°C - T<sub>5</sub> - 60°C/90°C  
 ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 480VAC/240VDC MAX  
 LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.  
 CAUTION: KEEP COVER TIGHT WHILE CIRCUITS ARE LIVE.

Model #:

Serial #:



www.electrosupply.com  
 sales@electrosupply.com  
 1-800-663-6576