



**MODEL NUMBER**

11-51546-A3

**PRODUCT LINE**


GO™ Switch 10/20 Series

**SPECIFICATIONS**

Model	11 Model
Contact Form	DMDB, (Form Z)
Sensing Range	Standard approx. 3/8" side
Outlet Position	Bottom of enclosure
Enclosure Material	Stainless steel w/polyurethane
Area Classification	CSA/FM CI I, Div 2
Wiring Options	6ft PVC lead wire
Regional Certification	No regional certification
Custom Field	

**WIRING DIAGRAM**

PVC/PTFE LEADS – 5 WIRE  
DMDB

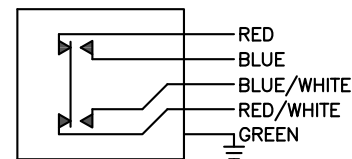

**NAMEPLATE**



COUNTRY OF ORIGIN US

CL I DIV 2, GRPS A,B,C,D; CL II DIV 2, GRPS F,G; CI III;  
T<sub>1</sub>:T<sub>4</sub> - 50°C = T<sub>5</sub> = 60°C/100°C  
ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 480VAC/240VDC MAX  
LEAD SEAL IS REQUIRED WITHIN 16" OF ENCLOSURE.

Model #:

Serial #:



www.electrosupply.com  
sales@electrosupply.com  
1-800-663-6576