


21-31516-A3

GO™ Switch 10/20 Series

Model	21 Model
Contact Form	SPDT (Form C) Latching
Sensing Range	Standard approx. 3/8" side
Outlet Position	Bottom of enclosure
Enclosure Material	Brass w/flat black lacquer
Area Classification	CSA/FM CI I, Div 2
Wiring Options	6ft PVC lead wire
Regional Certification	No regional certification
Custom Field	

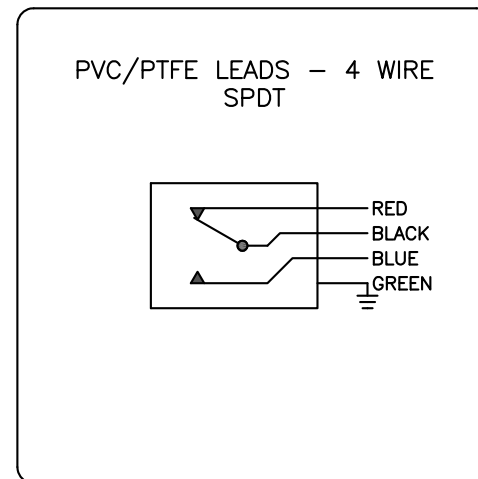

CL I DIV 2, GRPS A,B,C,D; CL II DIV 2, GRPS F,G; CI III;  
 T6;T4 - 50°C = T5 = 60°C/100°C  
 ELECTRICAL RATING: 120VAC/10A, 24VDC/3A RESISTIVE; 480VAC/240VDC MAX  
 LEAD SEAL IS REQUIRED WITHIN 16" OF ENCLOSURE.

Model #:

Serial #:



www.electrosupply.com  
 sales@electrosupply.com  
 1-800-663-6576