


DRAWING NUMBER: 21EN381
 PAGE 1 OF 1
 ISSUE: 9
 REVISIONS:
 A 81262 15 OCT 95
 B 82118 16 JAN 96
 CHECK: JAF 24OCT95
 DDM/CAD DRAWN: LJK 16OCT95

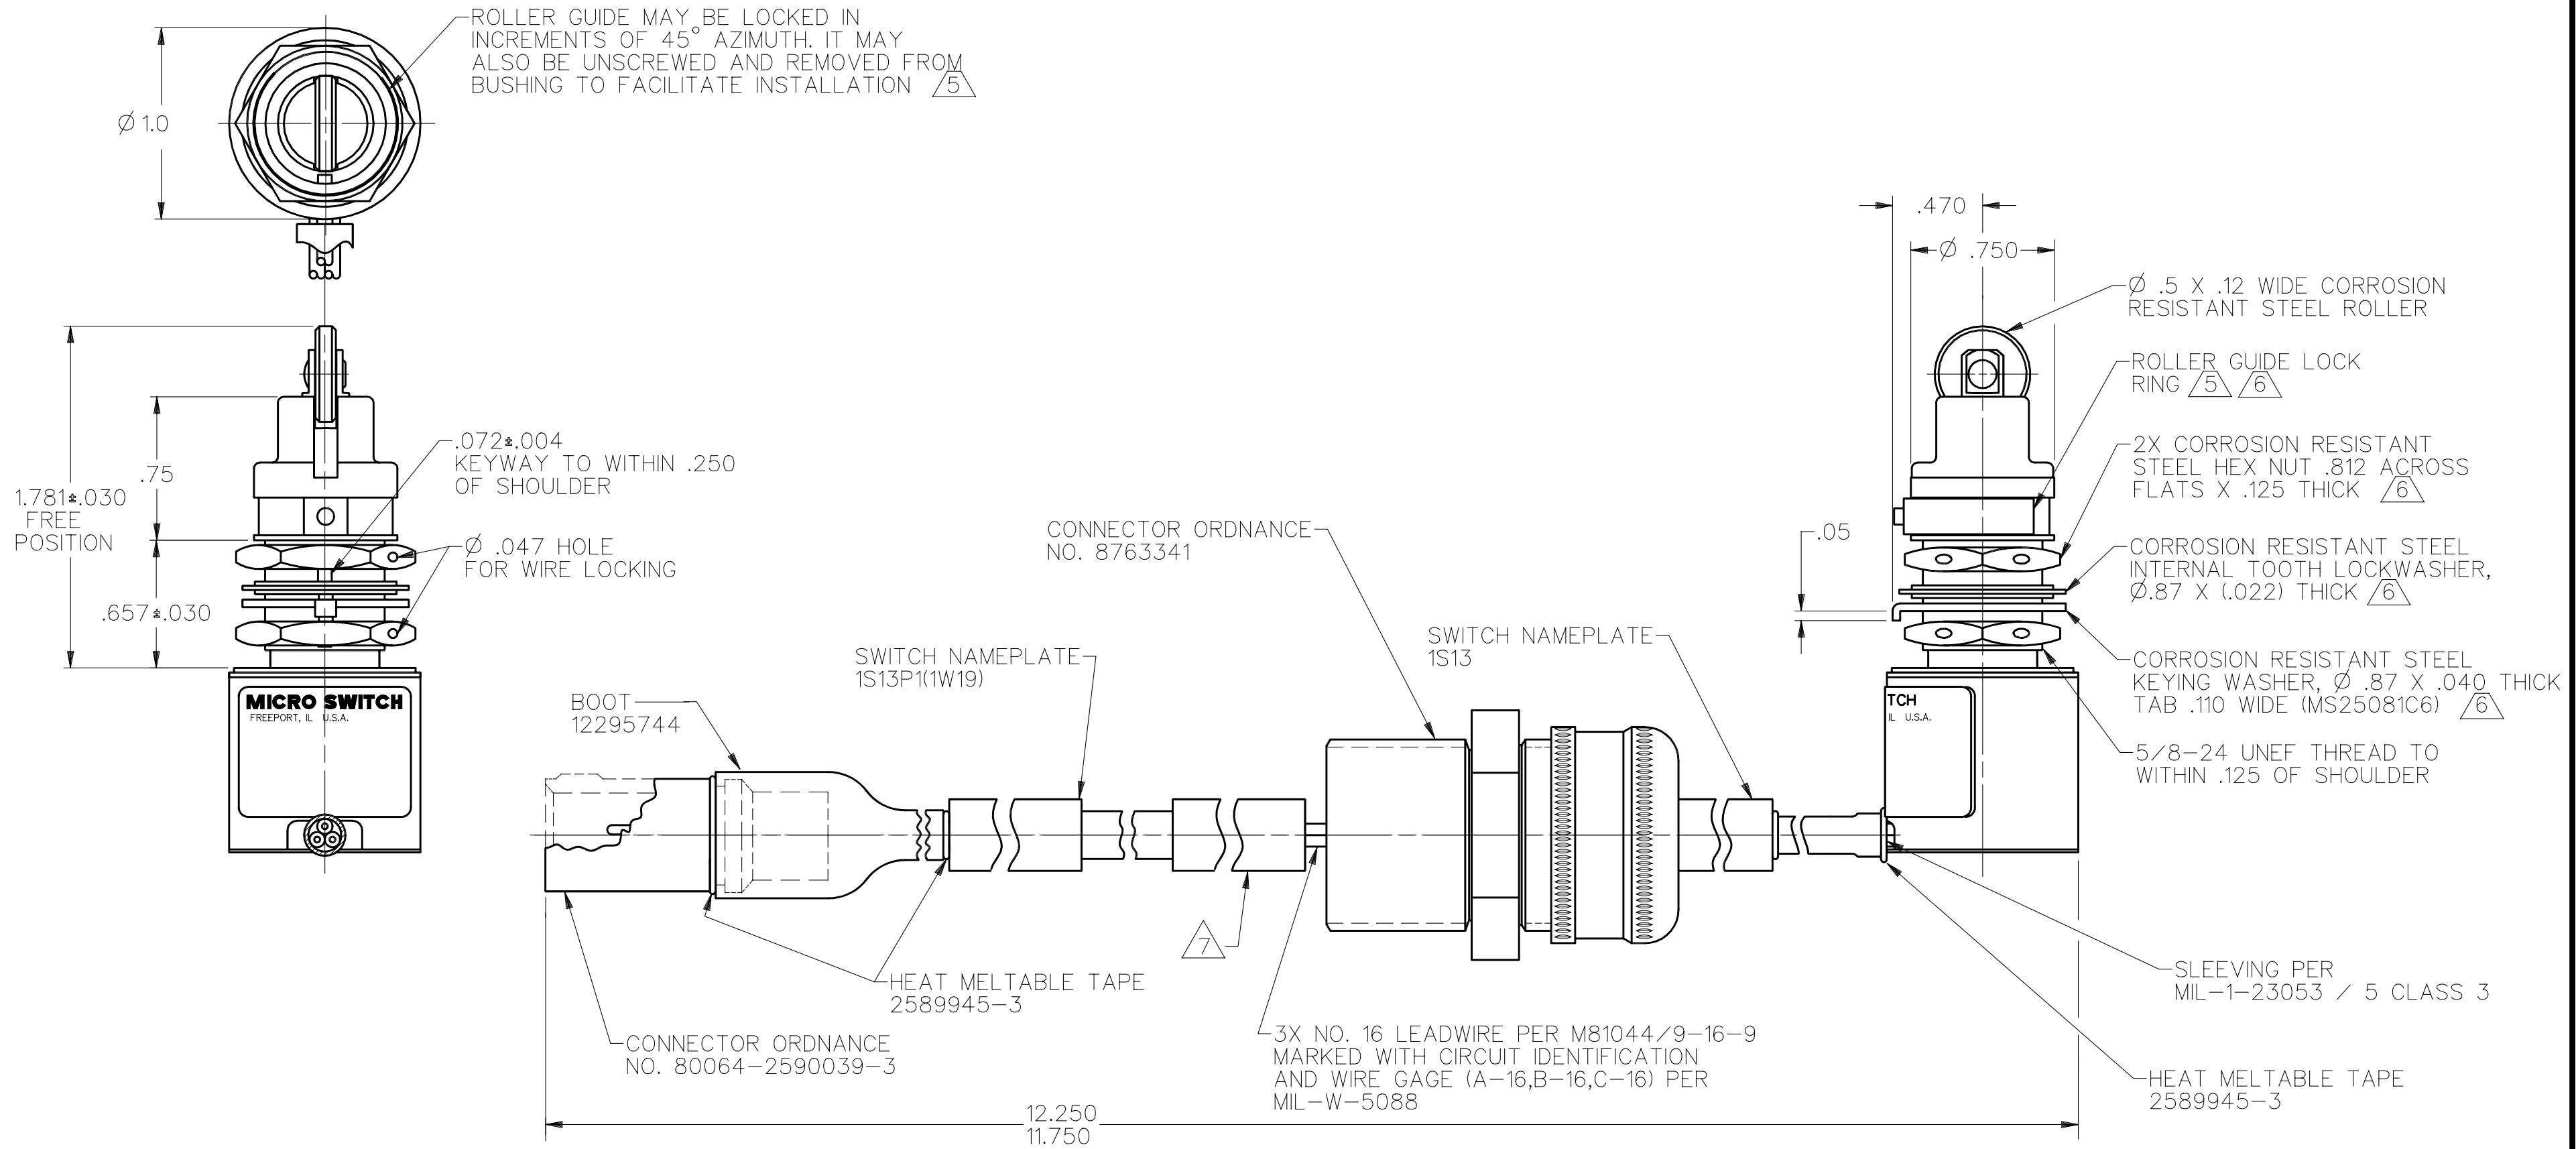

- NOTES
- 1 - CORROSION RESISTANT STEEL ENCLOSURE
 - 2 - SWITCH SEALED PER MIL-S-8805 SYMBOL 4
 - 3 - CIRCUIT DIAGRAM AND CATALOG LISTING ARE SHOWN ON NAMEPLATE
 - 4 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- (5) TO ADJUST ROLLER DIRECTION, REMOVE ROLLER GUIDE LOCK RING, SCREW ROLLER GUIDE DOWN AS FAR AS POSSIBLE, THEN UNSCREW TO DESIRED DIRECTION. SECURE BY REPLACING ROLLER GUIDE LOCK RING
- (6) HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-S-8805 NAMEPLATE WITH THE FOLLOWING INFORMATION: 19207-12328970 MFR-80212

CHARACTERISTICS		ELECTRICAL DATA	
OPERATING FORCE	6-12 LBS	CONTACT ARRANGEMENT	
FULL OVERTRAVEL FORCE	30 LBS MAX	S P D T	
RELEASE FORCE	4 LBS MIN	28 VDC	
PRETRAVEL	.040 MAX	LOAD	SEA LEVEL 50,000 FT
DIFFERENTIAL TRAVEL	.020 MAX	RES	4 4
OVERTRAVEL	.250 MIN	IND	2 2
		MOTOR	4

MASTER REDUCED
ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - ENCLOSED

CATALOG LISTING
21EN381
U.S. ARMY DRAWING
19207-12328970

FED. MFG. CODE 91929

THIRD ANGLE PROJECTION

SCALE 1.5 : 1

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT