

MODEL NUMBER

81-20523-F3

PRODUCT LINE


GO™ Switch Model 81

SPECIFICATIONS

Model	81 Model
Contact Form	DPDT (Form CC)
Sensing Range	Approx. 1/4" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	Stainless steel
Area Classification	UL CI 1, Div 1
Wiring Options	6ft Teflon lead wire
Regional Certification	no regional certification
Custom field	

WIRING DIAGRAM

PVC/PTFE LEADS - 7 WIRE
DPDT

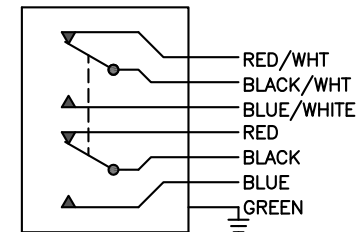

NAMEPLATE



COUNTRY OF ORIGIN US

CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III, TYPE 4X
ELECTRICAL RATING: 1250V, 10A MAX, 600V MAX, 24VDC/3A RESISTIVE
STD. DUTY PILOT DUTY 120VAC; HEAVY DUTY PILOT DUTY 600VAC
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #:

Serial #:



www.electrosupply.com
sales@electrosupply.com
1-800-663-6576