
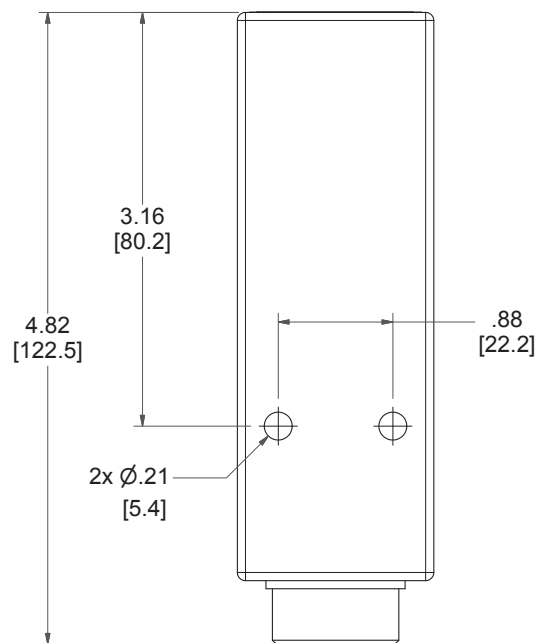




MODEL NUMBER

81-20524-A3

PRODUCT LINE


GO™ Switch Model 81

SPECIFICATIONS

Model	81 Model
Contact Form	DPDT (Form CC)
Sensing Range	Approx. 1/4" end sensing
Outlet Position	Bottom of enclosure
Enclosure Material	Stainless steel
Area Classification	CSA/FM CI 1, Div 1
Wiring Options	6ft PVC lead wires
Regional Certification	no regional certification
Custom field	

WIRING DIAGRAM

PVC/PTFE LEADS – 7 WIRE
DPDT

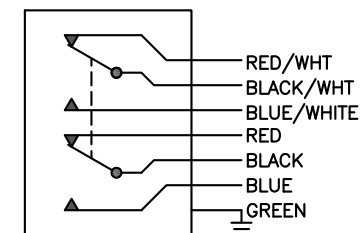

NAMEPLATE



CL I DIV 1, GRPS A,B,C,D; CL II DIV 1, GRPS E,F,G; CL III:
ELECTRICAL RATING: 120VAC/10A, 28VDC/3A RESISTIVE; 600VAC MAX
LEAD SEAL IS REQUIRED WITHIN 18" OF ENCLOSURE.

Model #:

Serial #:

GO
SWITCH

Electrol

www.electrolsupply.com
sales@electrolsupply.com
1-800-663-6576