

no longer available - archive entry Alternative article: AC1376

When selecting an alternative article and accessories please note that technical data may differ!


ecomat300

AC1326



ASI DP GATEWAY 2 MASTER

AS-Interface bus system

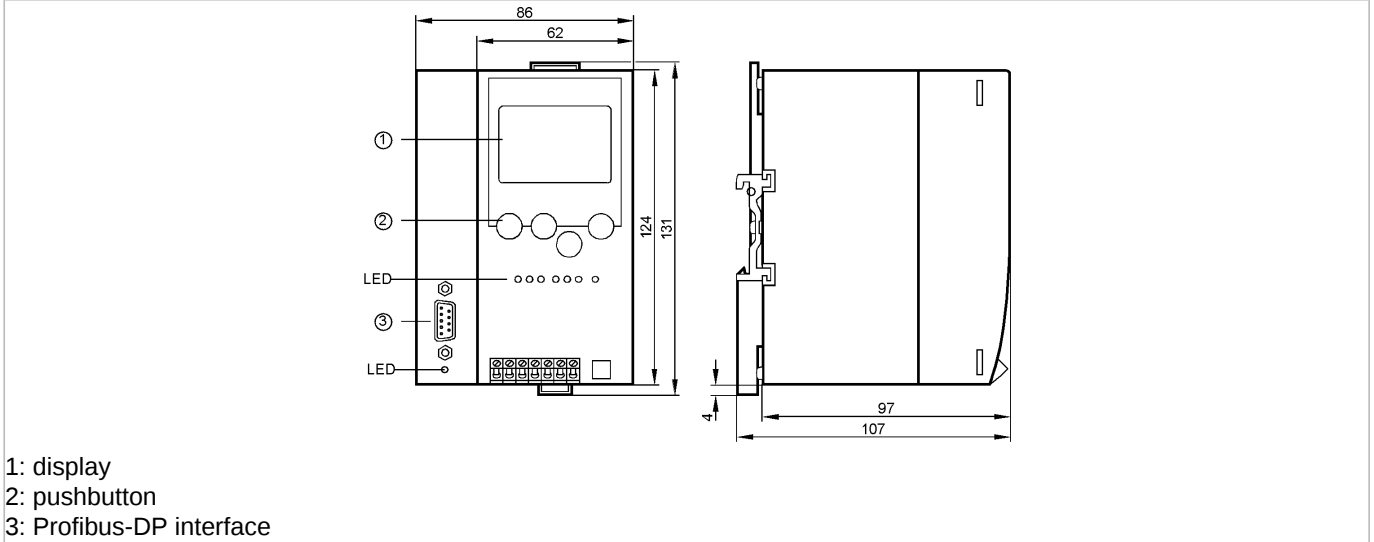

- 1: display
- 2: pushbutton
- 3: Profibus-DP interface



Product characteristics


AS-i DP gateway	
Housing for DIN rail mounting	
Profibus DP interface	
Full master functions	
Graphic display	
Application	
Application	Use as Profibus DP gateway with 2 AS-i masters
Electrical data	
Number of AS-i masters	2
Operating voltage [V]	24 DC **)
Total current consumption from AS-i [mA]	< 10
Current consumption from 24 V DC [mA]	< 400
Power consumption [VA]	< 10
Insulation rating [V]	500
Electrical separation	yes
Interfaces	
Diagnosis via Profibus DP	yes
Data interface	Profibus-DP; max. 12M Baud; EN 50170
Environment	
Ambient temperature [°C]	0...60
Storage temperature [°C]	-20...70
Max. relative air humidity [%]	< 95
Protection	IP 20
AS-i classification	
AS-i version	2.1
AS-i profile	M3
AS-i certificate	61106
Mechanical data	
Housing materials	aluminum; steel sheet galvanised
Weight [kg]	0.54
Displays / operating elements	

AC1326 - AS-i DP gateway - eclass: 27259090 / 27-25-90-90

Display		full graphic LCD display
Power	LED	3 x red; 3 x green; 2 x yellow

Electrical connection

Wiring



Remarks		**) cULus - Class 2 source required
Pack quantity	[piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — AC1326 — 23.01.2013
 no longer available - archive entry Alternative article: AC1376

When selecting an alternative article and accessories please note that technical data may differ!