

Alternative article: AC1357

When selecting an alternative article and accessories please note that technical data may differ!


ecomat300

AC1353



ControllerE 1Master Ethernet

AS-Interface bus system

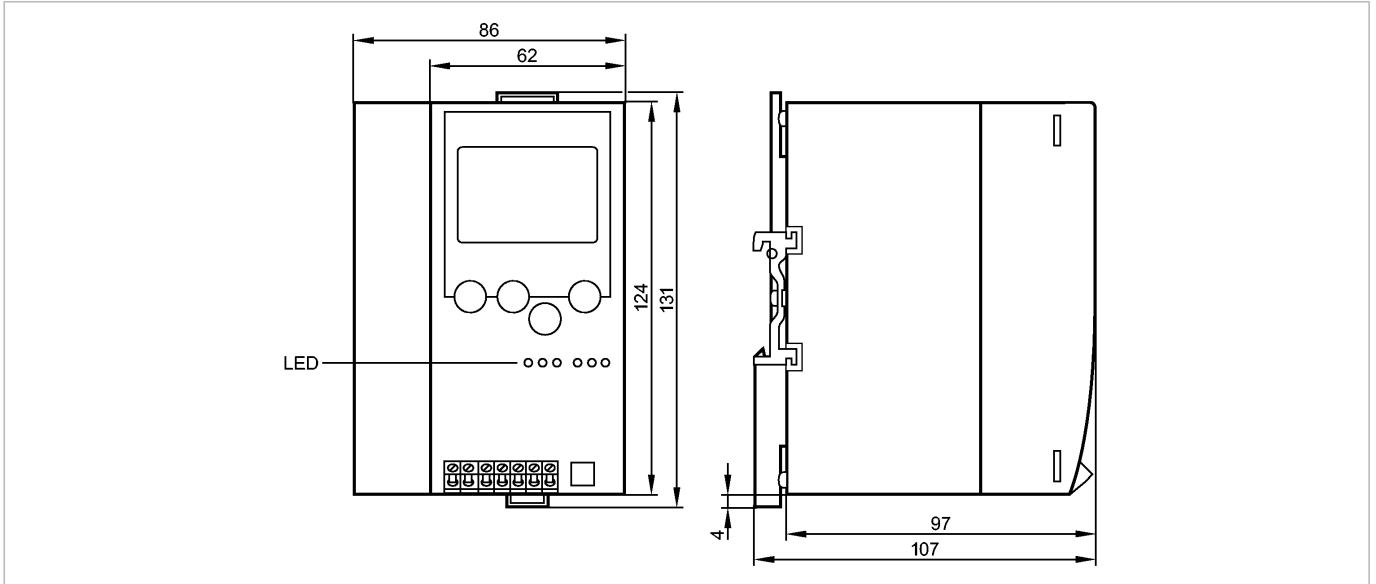

Product characteristics

AS-i controller E

Housing for DIN rail mounting

AS-i controller

freely programmable

Full master functions

Graphic display

Ethernet programming interface

Application

Application

Use as decentralised controller

Electrical data

Number of AS-i masters

1

Operating voltage [V]

24 DC *)

Total current consumption from

AS-i [mA]

< 10

Current consumption from 24 V

DC [mA]

< 400

Power consumption [VA]

< 10

Insulation rating [V]

500

Electrical separation

yes

Software / programming

PLC memory for user program

[Kwords]

128

Interfaces

Programming interface

RS-232 C; RJ11; 9600...115200 Baud galvanically separated

Programming interface

Ethernet CAA; RJ 45; 10/100 MBaud

Data interface

Modbus / TCP

Environment

Ambient temperature [°C]

0...60

Storage temperature [°C]

-20...70

Protection

IP 20

AS-i classification


AS-i version

2.1

AC1353 - AS-i controller E - eclass: 27259090 / 27-25-90-90

AS-i profile	M3
AS-i certificate	in preparation
Mechanical data	
Housing materials	aluminum; steel sheet galvanised
Weight [kg]	0.557
Displays / operating elements	
Display	full graphic LCD display
Function display LED	1 x red; 2 x green; 3 x yellow
Electrical connection	

Wiring



Remarks	
Remarks	*) cULus - Class 2 source required
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — AC1353 — 19.08.2013

Alternative article: AC1357

When selecting an alternative article and accessories please note that technical data may differ!