

no longer available - archive entry Alternative article: AC2048

When selecting an alternative article and accessories please note that technical data may differ!


ecomat300

AC2058



Airbox 2DI 1PO M12 V2A

AS-Interface bus system

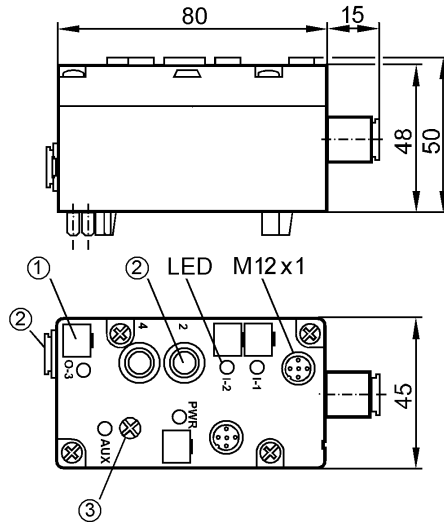

- 1: label
- 2: tube connection 8 mm
- 3: screw for manual override



Product characteristics

AS-i AirBox	
AS-i interface to FC-E lower parts	
Sockets M12 x 1	
Connection to the pneumatic system by tube fittings	
1 x 2 or 2 x 1 digital inputs	
1 pneumatic output (NO/NC selectable)	
Electrical data	
Electrical design	2 inputs / 1 output NO/NC selectable (monostable)
Operating voltage [V]	26.5...31.6 DC
Current consumption [mA]	< 165
Inputs	
digital	
Circuit	PNP
Sensor supply	AS-i
Voltage range [V]	20...30 DC
Max. current load for all inputs total [mA]	100
Input current High/Low [mA]	> 3 / < 1.5
Switching level High signal 1 [V]	> 10
Short-circuit proof	yes
Outputs	
digital	
Output function	common exhaust; external valve supply 24 V DC
Voltage range [V]	18...30 DC
External voltage supply	according to PELV
Integrated watchdog	yes
Environment	
Ambient temperature [°C]	0...55, use below 0 °C possible with a special compressed air treatment
Protection	IP 67
Tests / approvals	

AC2058 - AS-i AirBox - eclass: 27242613 / 27-24-26-13

EMC	EN 50295										
AS-i classification											
AS-i profile	S-3.F										
I/O configuration [hex]	3										
ID code [Hex]	F										
AS-i certificate	in preparation										
Data bits	<table border="1"> <thead> <tr> <th>Data bit</th> <th>D0</th> <th>D1</th> <th>D2</th> <th>D3</th> </tr> </thead> <tbody> <tr> <td>In-/outputs</td> <td>I-1</td> <td>I-2</td> <td>O-3</td> <td>not used</td> </tr> </tbody> </table>	Data bit	D0	D1	D2	D3	In-/outputs	I-1	I-2	O-3	not used
Data bit	D0	D1	D2	D3							
In-/outputs	I-1	I-2	O-3	not used							
Mechanical data											
Pneumatic system	one 4/2-way seat valve										
Operating pressure range [bar]	3...8 **)										
Air flow at 6/5 bar [Nl/min]	500										
Air flow at 6/0 bar [Nl/min]	700										
Permissible compressed air	filtered (5 µm); lubricated (ISO-VG10) or not lubricated										
Housing materials	housing: PBT; Metal parts: stainless steel (303S22); sealing: Viton										
Weight [kg]	0.258										
Displays / operating elements											
Power LED	green										
Function display LED	yellow										
Electrical connection											
Connection	contact pins on FC or SC lower module										
Wiring	<p>I-1</p> <p>1: Sensor supply L+ 2: Data input 2 3: Sensor supply L- 4: Data input 1</p> <p>I-2</p> <p>1: Sensor supply L+ 4: Data input 2 3: Sensor supply L-</p>										
Accessories											
Accessories (optional)	Silencer (E75232)										
Remarks											
Remarks	**) incl. possible pressure peaks 1) Notes on compressed air and EMC/ESD at www.ifm.com										
Pack quantity [piece]	1										
Other data											
Tube fitting [type/mm]	Legris LF 3000/8										

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — AC2058 — 19.06.2012

no longer available - archive entry Alternative article: AC2048

When selecting an alternative article and accessories please note that technical data may differ!