

no longer available - archive entryreplaced by: E74210


ecomat300

AC4004



Flat cable 1 meter TPE bk

AS-Interface bus system

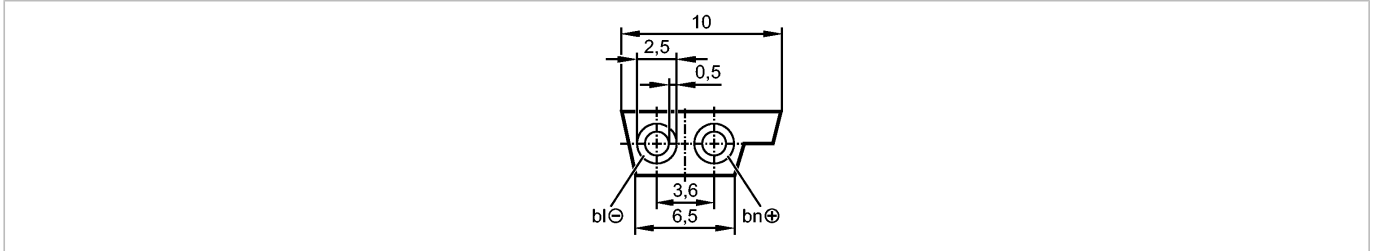

Product characteristics

AS-i flat cable

for use in insulation displacement connector technology for FC lower parts and compact modules

Reverse polarity protection due to special shape

Electrical data

Electrical design external 24 V power supply

Environment

Ambient temperature [°C] -40...105

Protection IP 67

Mechanical data

Weight [kg] 0.076

Electrical connection

Connection 2 x 1.5 mm²

Material

Thermoplastic elastomer (mixture YM5) to DIN 0207 part 5

Sheath color

black

Remarks

Remarks Available lengths: 25 m / 50 m / 100 m / 1000 m

Pack quantity [piece] 1

Other data

Previous article no.	Material / Colour	Application	Length [m]	Length [m]	Length [m]	Length [m]
			100	50	500	1000
AC4000	EDPM / ye		E74000	E74002	E74003	—
AC4002	EDPM / bk		E74010	E74012	E74013	
AC4001	PUR / ye		E74100	—	—	E74104
AC4006	PUR / bk		E74110	—	—	E74114
AC4003	TPE / ye		E74200	—	—	—
AC4004	TPE / bk		E74210	—	—	—
AC4005	TPR / rd		E74220	—	—	—
AC4007	TPE-PVC / ye	Food industry	E74300	—	—	—
AC4008	TPE-PVC / bk	Food industry	E74310	—	—	—

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — AC4004 — 29.02.2012

no longer available - archive entryreplaced by: E74210