


## DXP-M21BNEB0000B

### Switchbox DXP and DXS

Enclosure	Tropicalized aluminum
Bus/Sensor	(2) Mechanical SPDT
Area Classification	Explosion proof / flame proof
Visual Display	90° Black OPEN, Yellow CLOSED
Shaft	NAMUR 304 stainless steel
Conduit Entries	(2) 3/4" NPT
O-Rings	Buna-N
Pilot	No pilot device(s)
Spool Valve	No spool valve
Valve Cv	No valve Cv
Manual Override	No manual override
Regional Certification	InMetro
N Switch	No N Switch

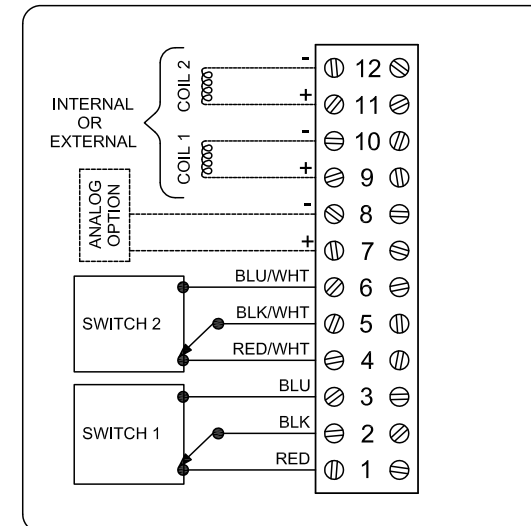


Ex d IIB + H<sub>2</sub> T6 Gb; IP66/67  
-50°C ≤ Ta ≤ 60°C  
NCC 12.1138X  
SWITCH: SPDT 15A/125VAC, 250VAC

Telemetição Equipamentos para uso em Locais Perigosos  
**AVISO:** Desligue a alimentação antes da manutenção. Manter bem fechado durante a operação. Deve ser conhecido por ser área segura antes da manutenção. Limpe apenas com um pano úmido.


TopWorx  
3300 Fern Valley Road  
Louisville, KY 40213 USA  
www.topworx.com

Serial #:

OPEN



CLOSED



Model #:

**Electrol**  
www.electrosupply.com  
sales@electrosupply.com  
1-800-663-6576