

no longer available - archive entry replaced by: EBC010


ecomat 400

E10446



ZDO8H059MSS0000-00STAM120MSS

Connection technology

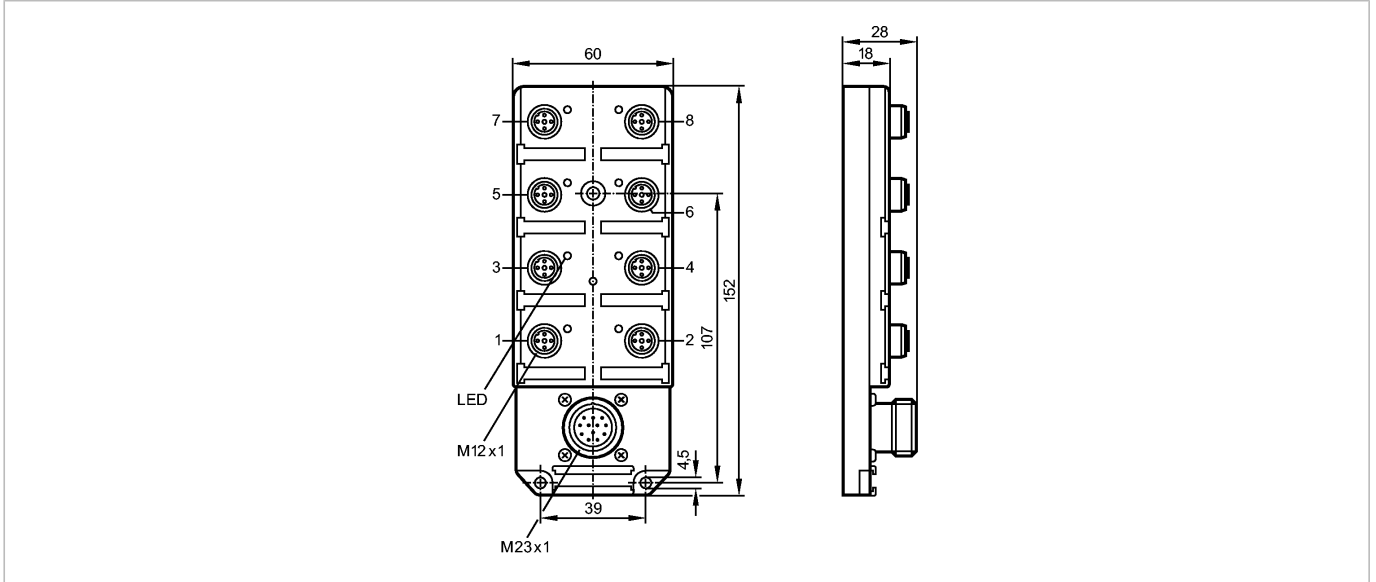

Product characteristics

Wiring block

M23 connector

Free from halogen

Free from silicone

gold-plated contacts

Electrical data

Electrical design

Operating voltage	[V]
Max. total current load	[A]
Max. current load per location	[A]
Protection class	

DC

10...30 DC

12

4

II

Environment

Ambient temperature	[°C]
Protection	

-15...80

IP 67

Mechanical data

Design

8 way

Housing materials

TPU (urethane)

Tightening torque for knurled nut [Nm]

0.5

Weight [kg]

0.272

Displays / operating elements

Output status indication LED

8 x yellow

Power LED

green




Electrical connection

Connection

M23 connector

Wiring

E10446 - Wiring block - eclass: 27279201 / 27-27-92-01

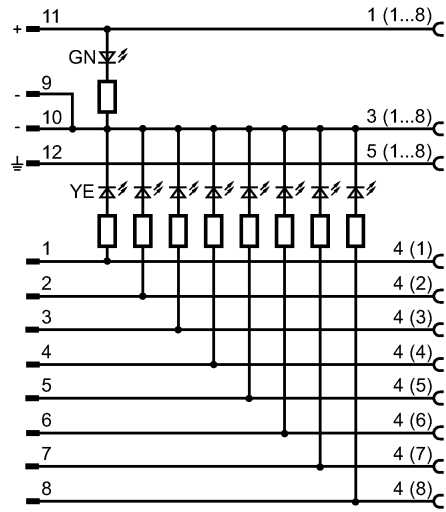

Remarks		
Pack quantity	[piece]	1
Other data		
Ports		M12

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E10446 — 20.09.2010
 no longer available - archive entryreplaced by: EBC010