

no longer available - archive entry replaced by: EBC036


ecomat 400

E11022



ZDO8H05HMSS0010H19

Connection technology

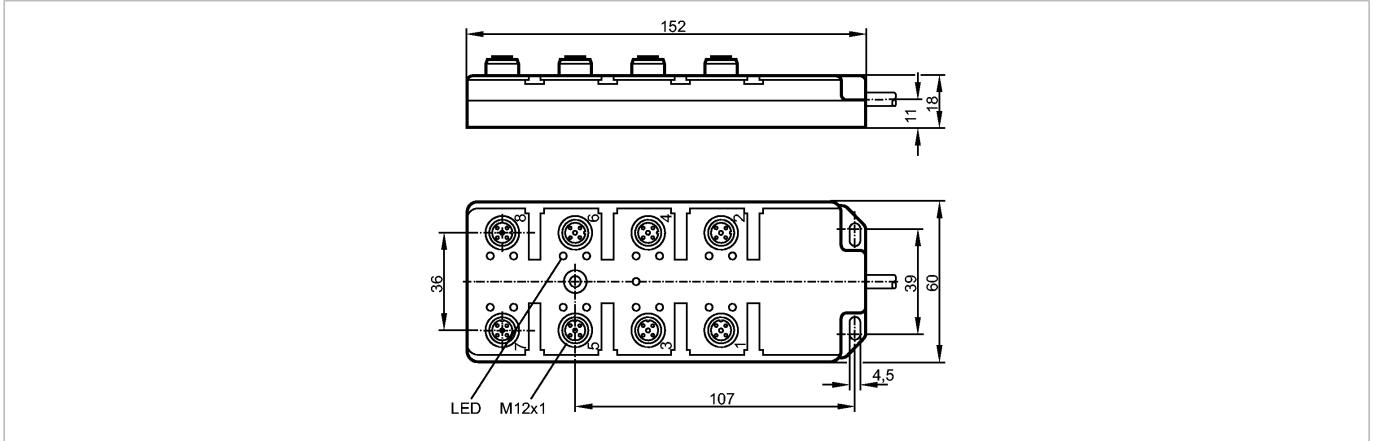

Product characteristics

Wiring block

Cable

Free from halogen

Free from silicone

gold-plated contacts

Electrical data

Electrical design

Operating voltage [V]

Max. total current load [A]

Max. current load per location [A]

Protection class

Environment

Ambient temperature [°C]

Protection

Mechanical data

Design

Housing materials

Tightening torque for knurled nut [Nm]

Weight [kg]

Displays / operating elements

Output status indication LED

Power LED

Electrical connection

Connection

Sheath color

Wiring

DC PNP

10...30 DC

12

4

II

-15...80

IP 67

8 way

TPU (urethane)

0.5

2.092

16 x yellow

green



PUR cable / 10 m;

16 x 0.5 mm² (63 x Ø 0.1 mm) + 3 x 1.0 mm² (127 x Ø 0.1 mm); Ø 11.6 mm;
halogen-free

black

E11022 - Wiring block - eclass: 27279201 / 27-27-92-01

- Core colors
- BK black
 - BN brown
 - BU blue
 - GN green
 - GY grey
 - PK pink
 - RD red
 - VT lilac
 - WH white
 - YE yellow

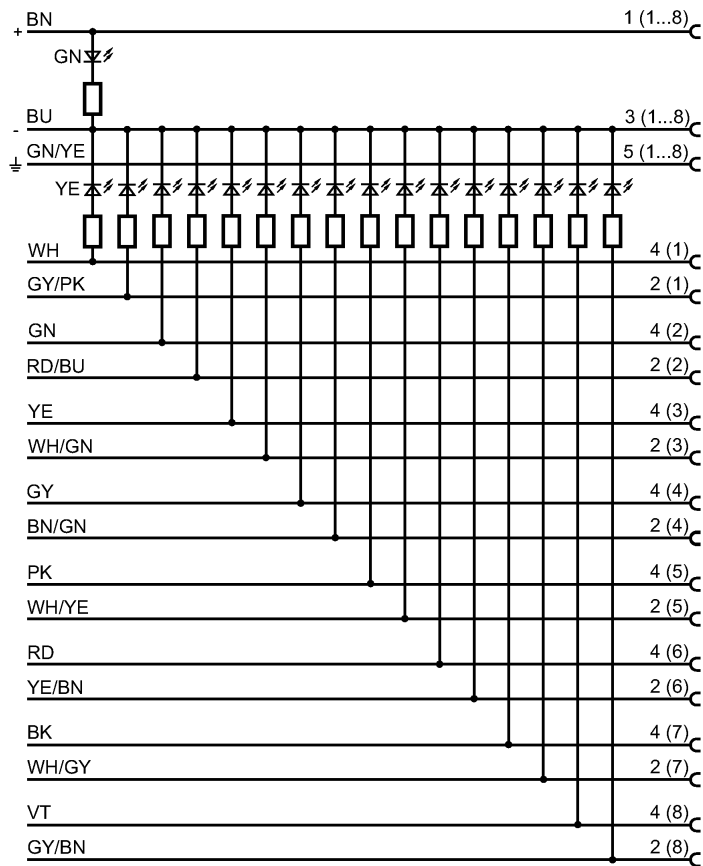

Remarks

Pack quantity

[piece]

1

Other data

Ports

M12

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E11022 — 21.07.2004
no longer available - archive entry replaced by: EBC036