

no longer available - archive entryreplaced by: EVC312


**ecomat 400**

E11206



VDOGF040MSS0001H04STGF040MSS

Connection technology

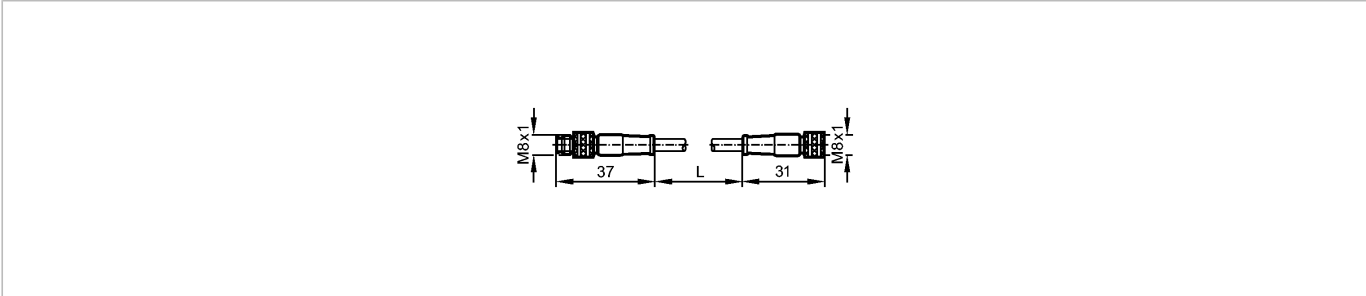

Product characteristics

Patchcords

M8-plug / M8-socket

Free from silicone

Free from halogen

gold-plated contacts

Electrical data

Electrical design

Operating voltage [V]

Current rating [A]

Protection class

Environment

Ambient temperature [°C]

Protection

Mechanical data

Design

Material body

Material nut

Tightening torque for knurled nut [Nm]

Weight [kg]

Electrical connection

Connection

Sheath color

AC/DC

60 AC / 75 DC

3

III

-25...80

IP 68

straight / straight

PUR

brass; nickel-plated

plug: 0.6...0.7 / socket: 0.6...0.7



0.044

PUR cable / 1 m;

4 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm); Ø 4.4 mm; halogen-free

black

Wiring



Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E11206 — 23.09.2005

no longer available - archive entryreplaced by: EVC312