

no longer available - archive entryreplaced by: EVC271


**ecomat 400**

E11335



VDOGF040MSS00.6H03STGF030MSS

Connection technology

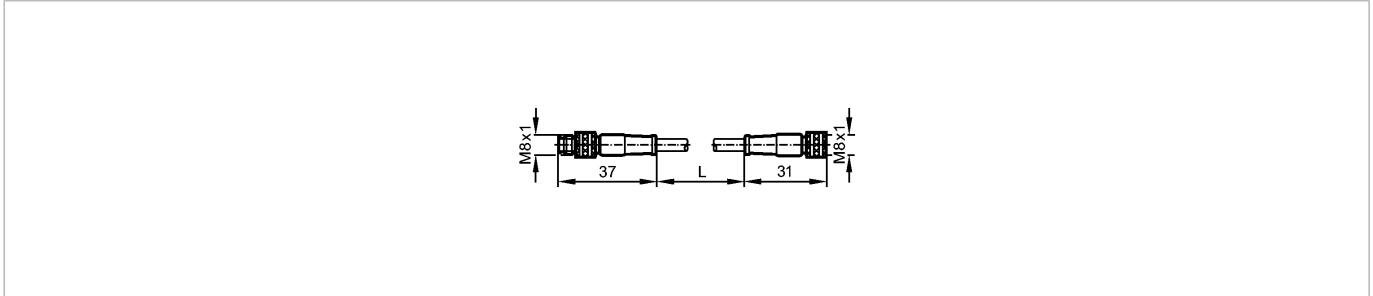

Product characteristics

Patchcords

M8-plug / M8-socket

Free from silicone

Free from halogen

gold-plated contacts

Electrical data

Electrical design

Operating voltage [V]

[V]

AC/DC

60 AC / 75 DC

Current rating [A]

[A]

3

Protection class

III

Environment

Ambient temperature [°C]

[°C]

-25...85

Protection

IP 68

Mechanical data

Design

straight / straight

Material body

PUR

Material nut

brass; nickel-plated

Tightening torque for knurled nut [Nm]

plug: 0.6...0.7 / socket: 0.6...0.7

Weight [kg]

[kg]

0.031

Electrical connection

Connection




PUR cable / 0.6 m;

3 x 0.25 mm<sup>2</sup> (32 x Ø 0.1 mm); Ø 4.1 mm; halogen-free

Sheath color

black

Wiring



Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E11335 — 23.09.2005

no longer available - archive entryreplaced by: EVC271