

no longer available - archive entryreplaced by: EVC040


**ecomat 400**

E11401



VDOGH030MSS00.3H03STGH030MSS

Connection technology

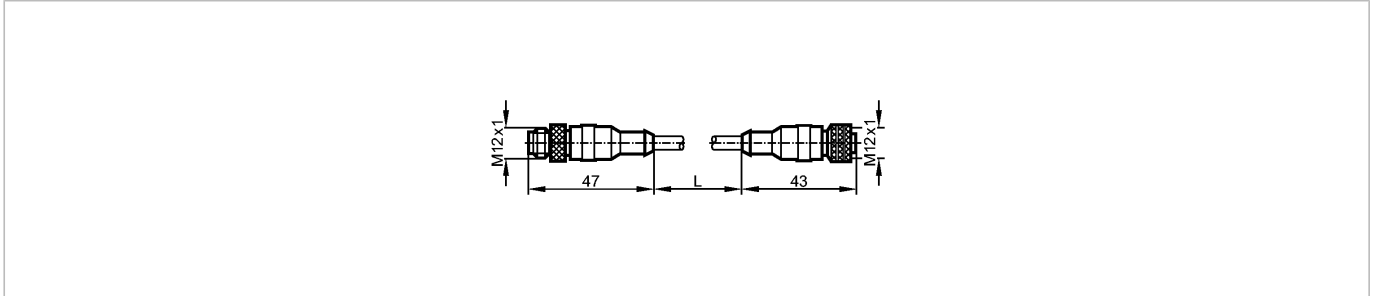

Product characteristics

Patchcords

M12 plug / M12 socket

Free from silicone

Free from halogen

gold-plated contacts

Electrical data

Electrical design

Operating voltage [V]

Current rating [A]

Environment

Ambient temperature [°C]

Protection

Mechanical data

Design

Material body

Material nut

Tightening torque for knurled nut [Nm]

Weight [kg]


Electrical connection

Connection

Sheath color

	AC/DC
Operating voltage [V]	250 AC / 300 DC
Current rating [A]	3
Ambient temperature [°C]	-25...85
Protection	IP 68
Design	straight / straight
Material body	PUR
Material nut	brass; nickel-plated
Tightening torque for knurled nut [Nm]	plug: 0.7...0.9 / socket: 0.7...0.9
Weight [kg]	0.04
Connection	PUR cable / 0.3 m; 3 x 0.34 mm <sup>2</sup> (42 x Ø 0.1 mm); Ø 4.3 mm; halogen-free
Sheath color	black

Wiring



Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E11401 — 01.09.2008

no longer available - archive entryreplaced by: EVC040