

no longer available - archive entryreplaced by: EVC014


**ecomat 400**

E11455



VDOGH040MSS0005H04STGH040MSS

Connection technology

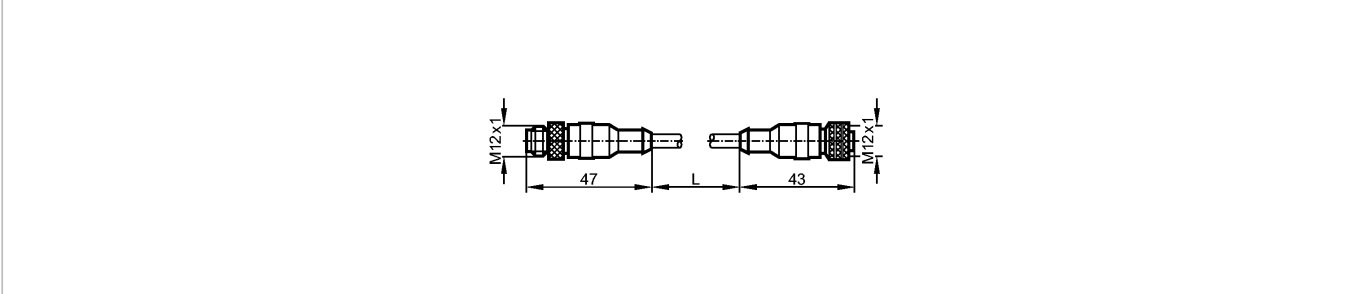

Product characteristics

Patchcords

M12 plug / M12 socket

Free from silicone

Free from halogen

gold-plated contacts

Electrical data

Electrical design

Operating voltage [V]

Current rating [A]

Environment

Ambient temperature [°C]

Protection

Mechanical data

Design

Material body

Material nut

Tightening torque for knurled nut [Nm]

Weight [kg]


Electrical connection

Connection

Sheath color

|  |  |
|--|--|
|  | AC/DC  |
| Operating voltage [V]                  | 250 AC / 300 DC  |
| Current rating [A]                     | 3  |
| Ambient temperature [°C]               | -25...85   |
| Protection                             | IP 68  |
| Design                                 | straight / straight  |
| Material body                          | PUR  |
| Material nut                           | brass; nickel-plated   |
| Tightening torque for knurled nut [Nm] | plug: 0.7...0.9 / socket: 0.7...0.9                                    |
| Weight [kg]                            | 0.183  |
| Connection                             | PUR cable / 5 m;<br>4 x 0.34 mm <sup>2</sup> (42 x Ø 0.1 mm); Ø 4.7 mm |
| Sheath color                           | black  |

Wiring



Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E11455 — 23.09.2005

no longer available - archive entryreplaced by: EVC014