




SDOAH040VASFKPG

Connection technology

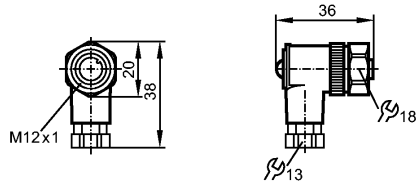

Product characteristics

Wireable socket

For sensors with

M12 connector

Free from silicone

Free from halogen

wireable

gold-plated contacts

Electrical data

Electrical design

AC/DC

Operating voltage [V]

45 AC / 70 DC

Current rating [A]

4; (...40 °C)

Environment

Ambient temperature [°C]

-25...85

Protection

IP 67

Mechanical data

Design

angled

Material body

PA

Material nut

high-grade stainless steel

Tightening torque for knurled nut [Nm]

0.7...0.9

Weight [kg]


0.028

Electrical connection

Connection

wireable; ...0.75 mm² (Ø 4...6 mm); screw terminals

Wiring



Remarks

Pack quantity

[piece]

1