


no longer available - archive entryreplaced by: E11550

**ecomat 400**

E18216




Connection technology

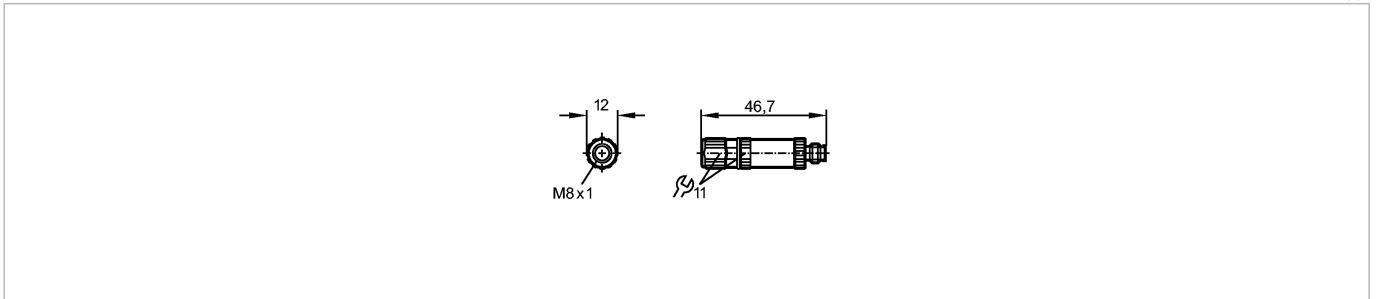

Product characteristics

Wirable plug	
M8 connector	
wireable	
gold-plated contacts	
Electrical data	
Electrical design	AC/DC
Operating voltage [V]	60 AC / 75 DC
Current rating [A]	4
Protection class	III
Environment	
Ambient temperature [°C]	-25...90
Protection	IP 67
Mechanical data	
Design	straight
Material body	PA
Material nut	brass; nickel-plated
Electrical connection	
Connection	wireable; insulation displacement technology, cable cross section 0.14...0.38 mm <sup>2</sup> , core insulation of the cable to be connected: PVC, TPE (Ø 1.0...1.6 mm), cable sheath Ø 3...5 mm

Wiring

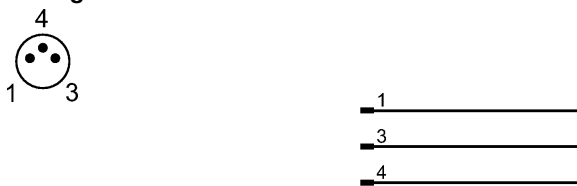

Remarks

Pack quantity	[piece]	1
---------------	---------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E18216 — 01.09.2008

no longer available - archive entryreplaced by: E11550