

no longer available - archive entry


efector200

E20073



FE-00-P-A-M4/2M

Fiber optics

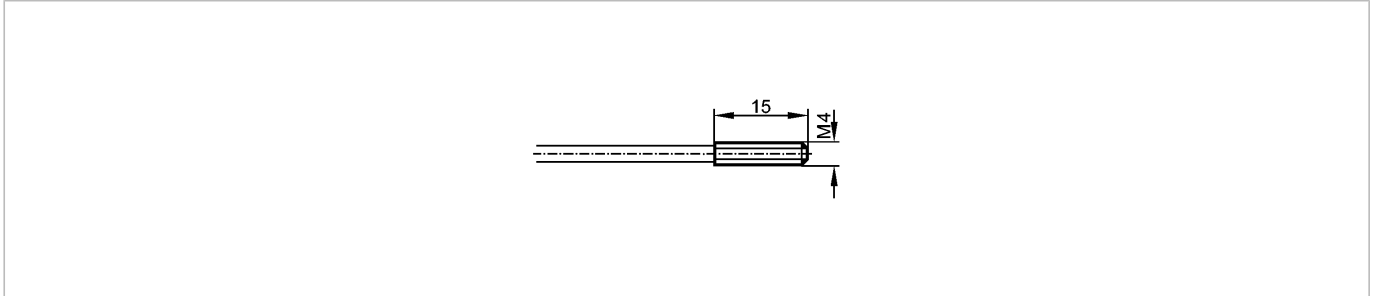

Product characteristics

Through-beam sensor

M4

Sensing range 96 mm

Connection to fibre optic amplifiers type OKF / OUF

Monitoring range

Sensing range OKF: 96 mm / OUF: 96 mm

Environment

Ambient temperature [°C] -20...80

Mechanical data

Design straight

Length [mm] 2000

Min. bending radius [mm] 10

Fiber arrangement



Fiber optic

glass

Sensing head

aluminum

Sheathing

PVC; adapter: PPO

Weight [kg]

0.063

Accessories

Accessories (included) 4 hexagon nuts; M4; 4 tooth lock washers; 1 knurled nut; M11

Remarks

Pack quantity [piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E20073 — 24.11.2006

no longer available - archive entry