


FT-00-R3

Fiber optics

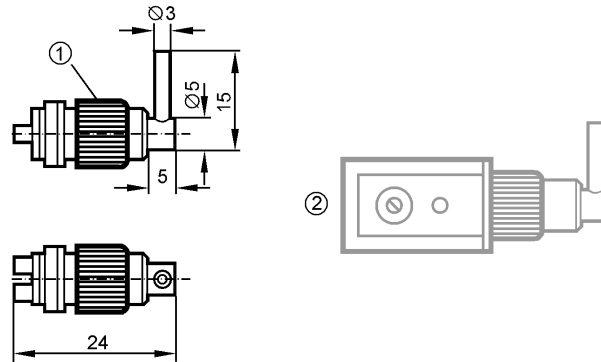

1: nut:
2: OKFF with fibre optic

Product characteristics

Diffuse reflection sensor

with adapter for direct mounting

Range 25 mm

Connection to fibre optic amplifiers type OKF

Monitoring range

Range OKF: 25 mm

Environment

Ambient temperature [°C] -20...80

Mechanical data

Design angled

Length [mm] 24

Fiber arrangement



Housing materials

nut: plastics

Fiber optic

glass

Sensing head

stainless steel (303S22)

Weight [kg]

0.015

Remarks

Pack quantity [piece] 1