


FT-00-MPV-M6/2.0M

Fiber optics

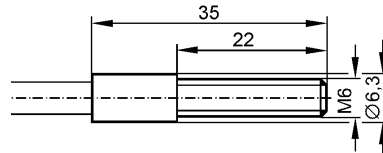

Product characteristics

Diffuse reflection sensor

M6

Range 10 mm

Connection to fibre optic amplifiers type OKF / OUF

Monitoring range

Range OKF: 10 mm / OUF: 10 mm

Environment

Ambient temperature [°C] -20...80

Mechanical data

Design straight

Length [mm] 2000

Min. bending radius [mm] 20

Fiber arrangement



Fiber optic

PMMA

Sensing head

stainless steel (303S22)

Sheathing

metal silicone

Weight [kg]

0.105

Accessories

Accessories (included) 2 hexagon nuts; M6; stainless steel; 2 tooth lock washers; 1 knurled nut; M11

Remarks

Pack quantity [piece] 1