




FE-11-E-V-E3R/2m

Fiber optics

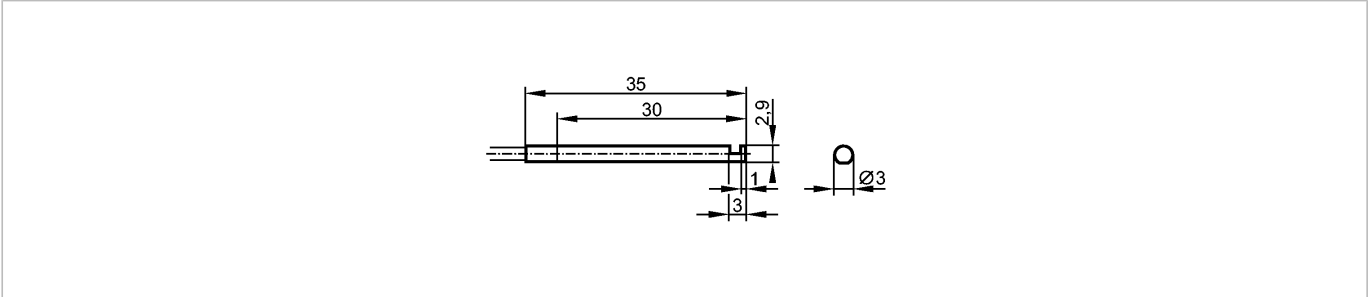

Product characteristics

Through-beam sensor 90°- deflection of the light beam

Ø 3 mm

Amplifier Sensing range

OB50xx 140 mm

OBFxxx 230 mm

OO50xx 400 mm

Monitoring range

Sensing range

OB50xx: 140 mm / OBFxxx: 230 mm / OO50xx: 400 mm

Environment

Ambient temperature [°C]

-40...70

Mechanical data

Design

angled

Length [mm]

2000

Min. bending radius [mm]

25

Fiber arrangement



Fiber optic

PMMA

Sensing head

stainless steel (303S22)

Sheathing

PE (polyethylene)

Weight [kg]

0.058

Accessories

Accessories (included)

E20107

Remarks

Pack quantity [piece]

1