


E33209

ADAPT IFM-CLAMP ISO2852 2" 3A

Accessories

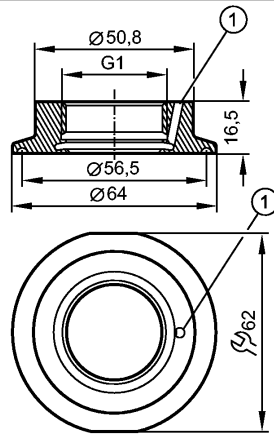

1: Leakage port



Product characteristics	
Aseptoflex Vario adapter	
Clamp	
2"	
with sealing ring	
ISO 2852	
for units with Aseptoflex Vario adapter	
Environment	
Pressure rating [bar]	16; to DIN 32676
MAWP (for applications according to CRN) [bar]	16
Tests / approvals	
Standard	ISO 2852
Mechanical data	
Process connection	Clamp adapter 2"
for units with process connection	Aseptoflex Vario
Design	with leakage port
Sealing	with sealing ring
Housing materials	stainless steel 316L / 1.4435
Surface characteristics Ra / Rz of the wetted part(s)	0.4 / 4
Hygienic class (to DIN 11866)	H4
Weight [kg]	0.229
Accessories	
Accessories (included)	O-ring 24 x 2 (EPDM), FDA compliant
Accessories (optional)	O-ring 24 x 2 (FPM), FDA compliant, order no. E30123; PEEK sealing ring, FDA conforming, order no. E30124
Remarks	
Pack quantity [piece]	1