

no longer available - archive entryreplaced by: EVC077


**ecomat 400**

E70033



ASTGH040MSS0005H04

Connection technology

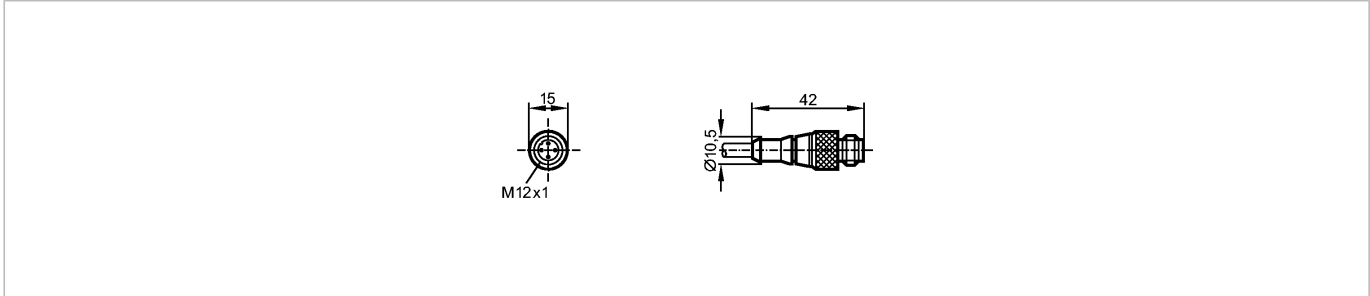

Product characteristics

Connector

M12 connector

Free from silicone

Free from halogen

gold-plated contacts

Electrical data

Electrical design

AC/DC

Operating voltage [V]

250 AC / 300 DC

Current rating [A]

4

Environment

Ambient temperature [°C]

-25...90

Protection

IP 67

Mechanical data

Design

straight

Material body

TPU (urethane)

Material nut

brass; nickel-plated

Tightening torque for knurled nut [Nm]

0.5

Weight [kg]

0.159

Electrical connection

Connection

PUR cable / 5 m;

4 x 0.34 mm<sup>2</sup> (42 x Ø 0.1 mm); Ø 4.8 mm; halogen-free

Sheath color

black

Wiring

Core colors

BK black

BN brown

BU blue

WH white



1 BN

2 WH

3 BU

4 BK

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — E70033 — 16.12.2004

no longer available - archive entryreplaced by: EVC077