



I/O Module for DeviceNet
8 digital npn/pnp inputs
FDNL-L0800-T

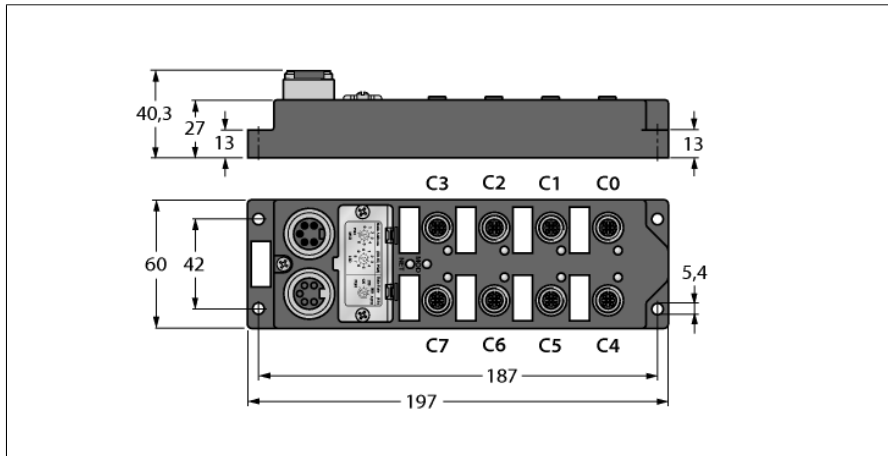


- 8 digital npn/pnp inputs
- Wire-break monitoring
- Channel-related diagnostics
- One channel per connector
- Glasfaserverstärktes PA6-Gehäuse
- Vibrations- und erschütterungsfest
- Vergossene Modulelektronik
- Metallsteckverbinder
- Schutzart IP67

Fieldbus



M12 × 1 Input



Type designation	FDNL-L0800-T
Ident no.	6603335
Number of channels	8
Operating / load voltage	11...26 VDC
Operating current	< 100 mA
Inputs	
Number of channels	(8) 3-wire npn/pnp sensors
Input voltage	13...26 VDC
Supply current	< 80 mA per input, short-circuit proof
Switching threshold	EN 61131-3
	low max.: 1.5 mA / high min.: 2 mA
Input delay	2.5 ms
Switching frequency	≤ 100 Hz
Max. input current	7 mA
Potential separation	galvanic isolation against the bus
Sensor supply	bus connection
Fieldbus transmission rate	125/250/500 kbps
Fieldbus addressing	0...63 (decimal) via coded rotary switches
Dimensions (W x L x H)	60 x 197 x 27mm
Housing material	fibre-glass reinforced Polyamide (PA6-GF30)
Mounting	4 mounting holes Ø 5,4 mm
Operating temperature	-25 bis 70 °C
Protection class	IP67
MTTF	212 years acc. to SN 29500 (Ed. 99) 20 °C
Approvals	CE, UL, CSA, FM

I/O Module for DeviceNet
8 digital npn/pnp inputs
FDNL-L0800-T

TURCK

Industrial
Automation

Data in process image

C1P4: Male Connector 1, 4-pole

ISS-3: Short-circuit channel 3

IOS-2: Wire-break channel 2:

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Input	Byte 0	C7P4	C6P4	C5P4	C4P4	C3P4	C2P4	C1P4	C0P4
	Byte 1	ISS-7	ISS-6	ISS-5	ISS-4	ISS-3	ISS-2	ISS-1	ISS-0
	Byte 2	IOS-7	IOS-6	IOS-5	IOS-4	IOS-3	IOS-2	IOS-1	IOS-0