

no longer available - archive entry


efector100

IB0099



IB-2030-ABOA/0.5m/UC

Inductive sensors

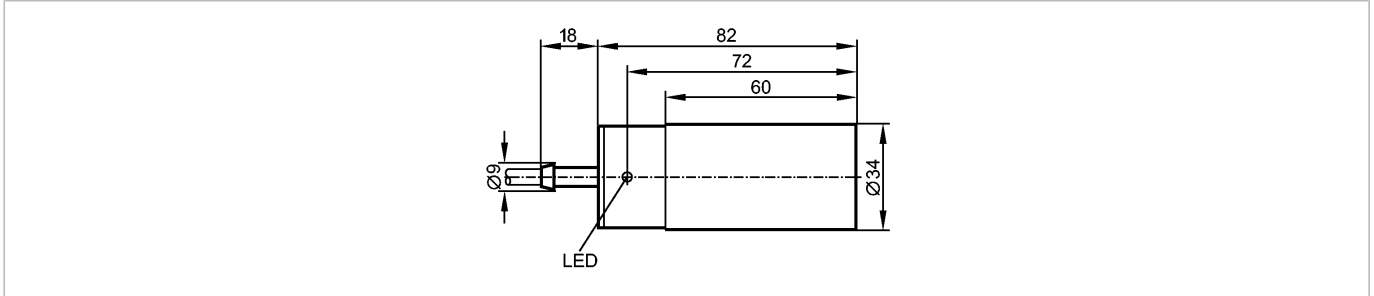

Product characteristics

Inductive sensor

Plastic housing Ø 34 mm

Cable with connector

Sensing range 30 mm; [nf] non-flush mountable

Electrical data

Electrical design

Operating voltage [V]

Protection class

Reverse polarity protection

Outputs

Output function

Voltage drop [V]

Minimum load current [mA]

Leakage current [mA]

Current rating

- Current rating (continuous) [mA]

- Current rating (peak) [mA]

Short-circuit protection

Overload protection

Switching frequency [Hz]

Monitoring range

Sensing range [mm]

Real sensing range (Sr) [mm]

Operating distance [mm]

Accuracy / deviations

Correction factors

Hysteresis [% of Sr]

Switch-point drift [% of Sr]

Environment

Ambient temperature [°C]

Protection

Tests / approvals

EMC

Mechanical data

Mounting

Housing materials

Displays / operating elements

Output status indication

Electrical connection


	AC/DC
Operating voltage [V]	20...250 AC/DC
Protection class	II
Reverse polarity protection	no
Output function	normally open
Voltage drop [V]	< 6.5 AC / < 6 DC
Minimum load current [mA]	5
Leakage current [mA]	< 2.6 (250 V AC) / < 1.4 (110 V AC) / < 0.9 (24 V DC)
- Current rating (continuous) [mA]	250 AC / 100 DC; 350 AC (...50 °C)
- Current rating (peak) [mA]	î: 2.2 A (20 ms / 0.5 Hz)
Short-circuit protection	no
Overload protection	no
Switching frequency [Hz]	25 AC / 100 DC
Sensing range [mm]	30
Real sensing range (Sr) [mm]	30 ± 10 %
Operating distance [mm]	0...24.3
Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10
Ambient temperature [°C]	-25...80
Protection	IP 67
EMC	EN 60947-5-2 EN 55011: class B
Mounting	non-flush mountable
Housing materials	PBT
Output status indication	yellow

IB0099 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Connection

PVC cable / 0.5 m; with M12 connector

Wiring



Accessories

Accessories (included)

Mounting clamp

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IB0099 — 20.01.2009
no longer available - archive entry