


IF0311

IFK2004BAROA/SL/LS-100AK RT

Inductive sensors

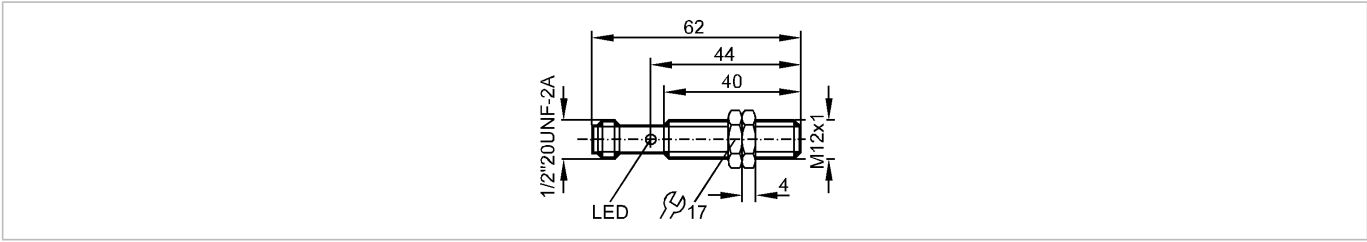

Product characteristics

Inductive sensor
Metal thread M12 x 1
Quick disconnect
Increased sensing range
Sensing range 4 mm; [f] flush mountable

Electrical data

Electrical design	AC/DC
Operating voltage [V]	20...140 AC / 10...140 DC (47...63 Hz AC)
Protection class	I
Reverse polarity protection	no

Outputs

Output function	normally open
Voltage drop [V]	< 5
Minimum load current [mA]	5
Leakage current [mA]	< 0.8

Current rating

- Current rating (continuous) [mA]	200
- Current rating (peak) [mA]	î: 0.9 A (20 ms / 0.5 Hz)
Short-circuit proof	no
Overload protection	no
Switching frequency [Hz]	25 AC / 200 DC

Monitoring range

Sensing range [mm]	4
Operating distance [mm]	0...3.25

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	3...15

Environment

Ambient temperature [°C]	-25...70
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	1271

Mechanical data

Mounting	flush mountable
----------	-----------------

IF0311

IFK2004BAROA/SL/LS-100AK RT

Inductive sensors

Housing materials	brass white bronze coated; PBT
-------------------	--------------------------------

Weight [kg]	0.03
-------------	------



Displays / operating elements

Output status indication	LED	red
--------------------------	-----	-----

Electrical connection

Connection	1/2" connector
------------	----------------

Wiring



Note: miniature fuse to IEC60127-2 sheet 1, ≤ 2 A (fast acting)

Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Remarks	Recommendation: check the unit for reliable function after a short circuit.
---------	---

Pack quantity [piece]	1
-----------------------	---