

no longer available - archive entryAlternative article: IF5321

When selecting an alternative article and accessories please note that technical data may differ!


efector100

IF5862



IF-3002-ANKG RT

Inductive sensors

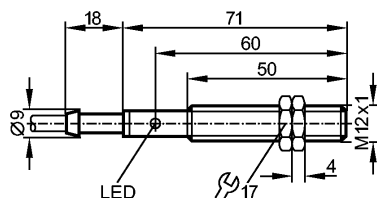

Product characteristics

Inductive sensor

Plastic thread M12 x 1

Cable

Sensing range 2 mm; [f] flush mountable

Electrical data

Electrical design

DC NPN

Operating voltage [V]

10...36 DC

Current consumption [mA]

15 (24 V)

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

800

Monitoring range

Sensing range [mm]

2

Real sensing range (Sr) [mm]

2 ± 10 %

Operating distance [mm]

0...1.6

Accuracy / deviations

Correction factors

mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-10...10

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

MTTF

[Years]

945

Mechanical data

Mounting

flush mountable

Housing materials

PBT

Weight [kg]

0.105

Displays / operating elements

Output status indication

LED

red

Electrical connection


Connection

PVC cable / 2 m; 3 x 0.34 mm²

Wiring

IF5862 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Core colors
BN brown
BU blue
BK black



Accessories	
Accessories (included)	2 lock nuts
Remarks	
Pack quantity	[piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IF5862 — 06.03.2003
no longer available - archive entryAlternative article: IF5321
When selecting an alternative article and accessories please note that technical data may differ!