

no longer available - archive entry Alternative article: IG6571

When selecting an alternative article and accessories please note that technical data may differ!


efectorio

IG5455



IGA3005-BNKG/V4A

Inductive sensors

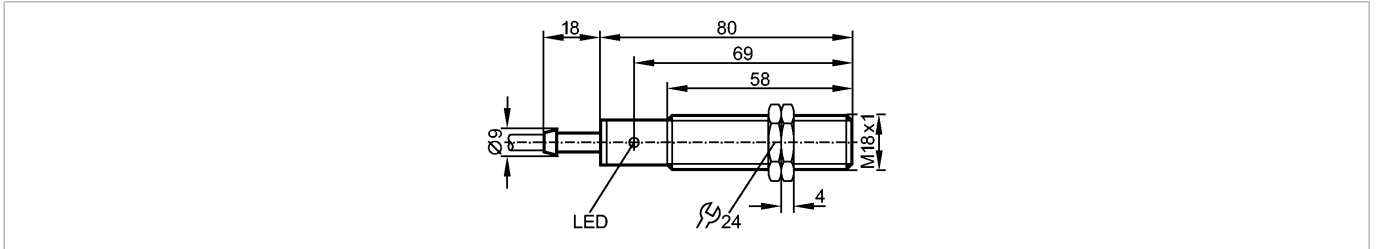

Product characteristics

Inductive sensor

Metal thread M18 x 1

Cable

Sensing range 5 mm; [f] flush mountable

Electrical data

Electrical design

DC NPN

Operating voltage [V]

10...36 DC

Current consumption [mA]

15 (24 V)

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally closed

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

500

Monitoring range

Sensing range [mm]

5

Real sensing range (Sr) [mm]

5 ± 10 %

Operating distance [mm]

0...4.05

Accuracy / deviations

Correction factors

mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-10...10

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

EN 55011:

class B

MTTF [Years]

1781

Mechanical data

Mounting

flush mountable

Housing materials

stainless steel 316Ti / 1.4571; PC (polycarbonate)

Weight [kg]

0.169

Displays / operating elements

Output status indication LED

yellow

Electrical connection

Connection


PVC cable / 2 m; 3 x 0.5 mm²

Wiring

IG5455 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Core colors

BN brown
BU blue
BK black



Accessories

Accessories (included)

2 lock nuts

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IG5455 — 06.03.2003

no longer available - archive entryAlternative article: IG6571

When selecting an alternative article and accessories please note that technical data may differ!