


IG5526

IGA3008-BPKG/US-100-DPS

Inductive sensors

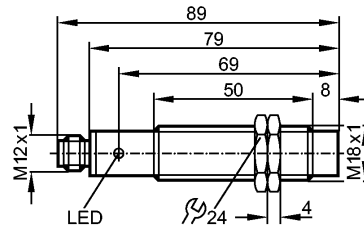

Product characteristics

Inductive sensor
Metal thread M18 x 1
Quick disconnect
Sensing range 8 mm; [nf] non-flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	300

Monitoring range

Sensing range [mm]	8
Real sensing range (Sr) [mm]	8 ± 10 %
Operating distance [mm]	0...6.5

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2 EN 55011: class B
MTTF [Years]	1853

Mechanical data

Mounting	non-flush mountable
Housing materials	brass white bronze coated; CO-PC
Weight [kg]	0.071

IG5526

IGA3008-BPKG/US-100-DPS

Inductive sensors


Displays / operating elements

Output status indication LED yellow

Electrical connection

Connection M12 connector

Wiring



Accessories

Accessories (included) 2 lock nuts

Remarks

Pack quantity [piece] 1