


IG5613

IG-2005-FRKG/6M/PH

Inductive sensors

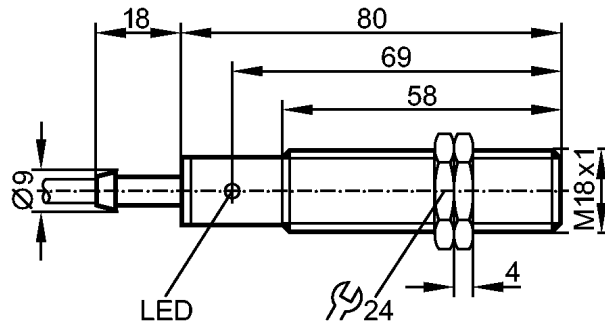

Product characteristics

Inductive sensor

Plastic thread M18 x 1

Cable

Sensing range 5 mm; [f] flush mountable

Electrical data

Electrical design	DC PNP/NPN
Operating voltage [V]	10...55 DC
Protection class	II
Reverse polarity protection	yes

Outputs

Output function	normally open / closed programmable
Voltage drop [V]	< 4.6
Minimum load current [mA]	4
Leakage current [mA]	< 0.8
Current rating [mA]	400
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	700

Monitoring range

Sensing range [mm]	5
Real sensing range (Sr) [mm]	5 ± 10 %
Operating distance [mm]	0...4.05

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2
MTTF [Years]	1835

Mechanical data

Mounting	flush mountable
Housing materials	PBT
Weight [kg]	0.305

Displays / operating elements


Output status indication LED	yellow
------------------------------	--------

Electrical connection

Connection	PUR / PVC cable / 6 m; 2 x 0.5 mm ²
------------	--

Wiring

Core colors
 BK black
 WH white

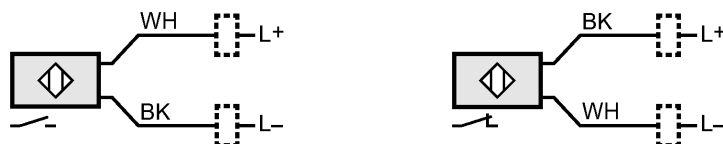

Accessories

Accessories (included)	2 lock nuts
------------------------	-------------

Remarks

Pack quantity [piece]	1
-----------------------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. —
 US — IG5613 — 13.01.2017