

no longer available - archive entry Alternative article: IIC220

When selecting an alternative article and accessories please note that technical data may differ!


efector100

I15810



IIA2010-ASI /US-100

Inductive sensors

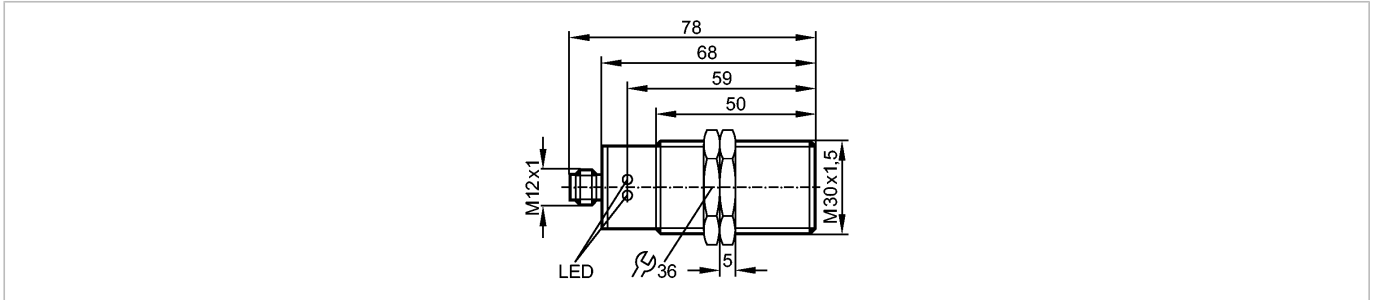

Product characteristics

Inductive sensor

Metal thread M30 x 1.5

Quick disconnect

Sensing range 10 mm; [f] flush mountable

Electrical data

Electrical design

AS-i

Operating voltage [V]

26.5...31.6 DC (AS-i)

Current consumption [mA]

< 30

Protection class

II

Reverse polarity protection

yes

Outputs

Short-circuit protection

yes (non-latching)

Overload protection

yes

Monitoring range

Sensing range [mm]

10

Environment

Ambient temperature [°C]

-25...70

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

EN 55011: class B

AS-i classification

AS-i profile

S-1.1

I/O configuration [hex]

1

ID code [Hex]

1

AS-i certificate

02901

Data bits

Data bit	D0	D1	D2	D3
Designation	switching signal	certain range	ready for operation	not used

Mechanical data

Mounting

flush mountable

Housing materials

brass white bronze coated; active face: PBT

Weight [kg]

0.145

Displays / operating elements

Output status indication LED

yellow

Function display LED

red (uncertain range/error message)
 Sr : 0...10 % (up to 10 Hz) Sn : 80...115 % (up to 10 Hz)
 wire break of the sensor coil, short-circuit of the sensor coil


Electrical connection

Connection

M12 connector

Wiring

II5810 - Inductive sensor - eclass: 27270101 / 27-27-01-01



Accessories	
Accessories (included)	2 lock nuts
Remarks	
Remarks	Assured range: approx. 10...80 % of Sn
Pack quantity	[piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — II5810 — 30.06.2004
 no longer available - archive entry Alternative article: IIC220

When selecting an alternative article and accessories please note that technical data may differ!