


IL5004

ILA3002-BPKG/OBEN/AS-514TPS RT

Inductive sensors

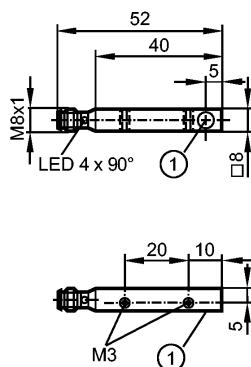

1: sensing face



Product characteristics

Inductive sensor

Rectangular Metal

Quick disconnect

Sensing range 2 mm; [f] flush mountable

Electrical data

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	III
Reverse polarity protection	yes

Outputs

Output function	normally open
Voltage drop [V]	< 1.6
Current rating [mA]	250
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	2000

Monitoring range

Sensing range [mm]	2
Real sensing range (Sr) [mm]	2 ± 10 %
Operating distance [mm]	0...1.6

Accuracy / deviations

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2
Hysteresis [% of Sr]	1...15
Switch-point drift [% of Sr]	-10...10

Environment

Ambient temperature [°C]	-25...70
Protection	IP 65

Tests / approvals

EMC	EN 60947-5-2
MTTF [Years]	3449

Mechanical data



IL5004

ILA3002-BPKG/OBEN/AS-514TPS RT

Inductive sensors

Mounting	flush mountable	
Housing materials	brass white bronze coated; active face: LCP	
Tightening torque	[Nm]	1 (For an insertion depth of at least 5 mm)
Weight	[kg]	0.015

Displays / operating elements

Output status indication	LED	red
--------------------------	-----	-----

Electrical connection

Connection	M8 connector
------------	--------------

Wiring



Remarks

Pack quantity	[piece]	1
---------------	---------	---