

no longer available - archive entry Alternative article: IN0085

When selecting an alternative article and accessories please note that technical data may differ!


**efectorio**

IN0086



IN-2004-BBOA/6M

Inductive sensors

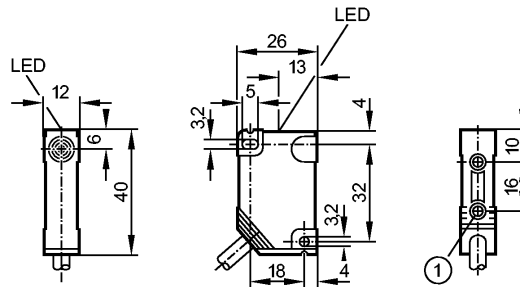

1: threaded insert M3, depth 5.8 mm, max. tightening torque 1.2 Nm (screw fixing class 8.8) when brass insert in contact with counterpart.



Product characteristics

Inductive sensor

Rectangular, plastics

Cable

Sensing range 4 mm; [nf] non-flush mountable

Electrical data

Electrical design

AC/DC

Operating voltage [V]

20...250 AC/DC

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally closed

Voltage drop [V]

< 6.7 AC / < 6 DC

Minimum load current [mA]

5

Leakage current [mA]

< 2.0 (250 V AC) / < 1.3 (110 V AC) / < 0.8 (24 V DC)

**Current rating**

- Current rating (continuous) [mA]

250 AC / 100 DC; 350 AC (...50 °C)

- Current rating (peak) [mA]

î: 2.2 A (50 ms / 1 Hz)

Short-circuit proof

no

Overload protection

no

Switching frequency [Hz]

25 AC / 50 DC

Monitoring range

Sensing range [mm]

4

Real sensing range (Sr) [mm]

4 ± 10 %

Operating distance [mm]

0...3.25

Accuracy / deviations

Correction factors

mild steel = 1 / stainless steel approx. 0.9 / brass approx. 0.6 / aluminium approx. 0.5 / Cu approx. 0.4

Hysteresis [% of Sr]

1...20

Switch-point drift [% of Sr]

-10...10

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 61000-4-2 ESD: 4 kV CD / 8 kV AD

EN 61000-4-3 HF radiated: 3 V/m

EN 61000-4-4 Burst: 2 kV

EN 61000-4-6 HF conducted: 3 V

**IN0086 - Inductive sensor - eclass: 27270101 / 27-27-01-01**


MTTF [Years]	EN 55011 (Emission):	class B
Mechanical data		609
Mounting		non-flush mountable
Housing materials		PBT
Weight [kg]		0.273
Displays / operating elements		
Output status indication LED		yellow
Electrical connection		
Connection		PVC cable / 6 m; 2 x 0.5 mm <sup>2</sup>

**Wiring**

Core colors

BN brown

BU blue



Note: miniature fuse to IEC60127-2 sheet 1,  
 $\leq 2$  A (fast acting)

Remarks	
Remarks	Recommendation: check the unit for reliable function after a short circuit.
Pack quantity [piece]	1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IN0086 — 23.06.2009  
 no longer available - archive entry Alternative article: IN0085

When selecting an alternative article and accessories please note that technical data may differ!