


**IN5130**

IN-3004-BPKG/6M

**Inductive sensors**

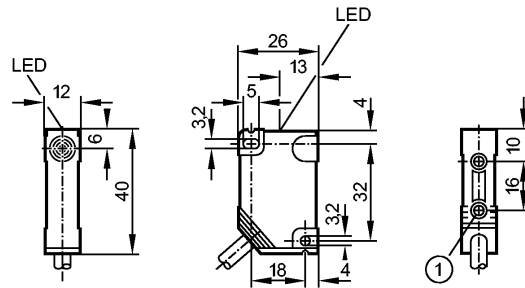

1: threaded insert M3, depth 5.8 mm, max. tightening torque 1.2 Nm (screw fixing class 8.8) when brass insert in contact with counterpart.



**Product characteristics**

Inductive sensor
Rectangular, plastics
Cable
Sensing range 4 mm; [nf] non-flush mountable

**Electrical data**

Electrical design	DC PNP
Operating voltage [V]	10...36 DC
Current consumption [mA]	15 (24 V)
Protection class	II
Reverse polarity protection	yes

**Outputs**

Output function	normally open
Voltage drop [V]	< 2.5
Current rating [mA]	250
Short-circuit protection	yes (non-latching)
Overload protection	yes
Switching frequency [Hz]	1300

**Monitoring range**

Sensing range [mm]	4
Real sensing range (Sr) [mm]	4 ± 10 %
Operating distance [mm]	0...3.25

**Accuracy / deviations**

Correction factors	mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2	
Hysteresis [% of Sr]	1...15	
Switch-point drift [% of Sr]	-10...10	

**Environment**

Ambient temperature [°C]	-25...80
Protection	IP 67

**Tests / approvals**

EMC	EN 60947-5-2 EN 55011:	class B
MTTF [Years]	1925	

## IN5130

IN-3004-BPKG/6M

Inductive sensors

### Mechanical data

Mounting	non-flush mountable
Housing materials	PBT
Weight [kg]	0.308

### Displays / operating elements

Output status indication	LED	yellow
--------------------------	-----	--------


### Electrical connection

Connection	PVC cable / 6 m; 3 x 0.5 mm <sup>2</sup>
------------	--

#### Wiring

Core colors

- BN brown
- BU blue
- BK black



### Remarks

Pack quantity	[piece]	1
---------------	---------	---