

no longer available - archive entry Alternative article: IN5207

When selecting an alternative article and accessories please note that technical data may differ!


efectorio

IN5263



IN-2002-FRKG/PH RT

Inductive sensors

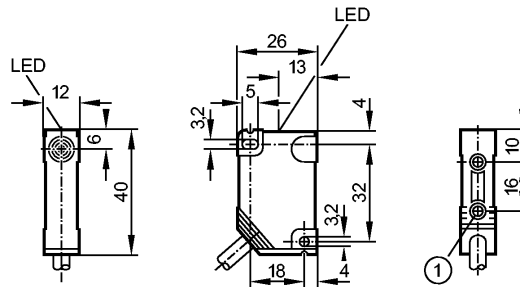

1: threaded insert M3, depth 5.8 mm, max. tightening torque 1.2 Nm (screw fixing class 8.8) when brass insert in contact with counterpart.



Product characteristics

Inductive sensor

Rectangular, plastics

Cable

Sensing range 2 mm; [f] flush mountable

Electrical data

Electrical design

DC PNP/NPN

Operating voltage [V]

10...55 DC

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open / closed programmable

Voltage drop [V]

< 4.6

Minimum load current [mA]

4

Leakage current [mA]

< 0.5

Current rating [mA]

400

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

1400

Monitoring range

Sensing range [mm]

2

Real sensing range (Sr) [mm]

2 ± 10 %

Operating distance [mm]

0...1.6

Accuracy / deviations

Correction factors

mild steel = 1 / stainless steel approx. 0.7 / brass approx. 0.4 / aluminium approx. 0.3 / copper approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-10...10

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

EN 55011: class B

MTTF [Years]

1773

Mechanical data

Mounting

flush mountable

Housing materials

PBT

IN5263 - Inductive sensor - eclass: 27270101 / 27-27-01-01

Weight	[kg]	0.098
Displays / operating elements		
Output status indication	LED	red
Electrical connection		
Connection		PUR / PVC cable / 2 m; 2 x 0.5 mm ²

Wiring

Core colors

BK black

WH white



Remarks

Pack quantity	[piece]	1
---------------	---------	---

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — IN5263 — 06.03.2003

no longer available - archive entry Alternative article: IN5207

When selecting an alternative article and accessories please note that technical data may differ!