

no longer available - archive entry replaced by: KG5047


efectoriso

KG5016



KG-2008-FRKG/PH RT

Capacitive sensors

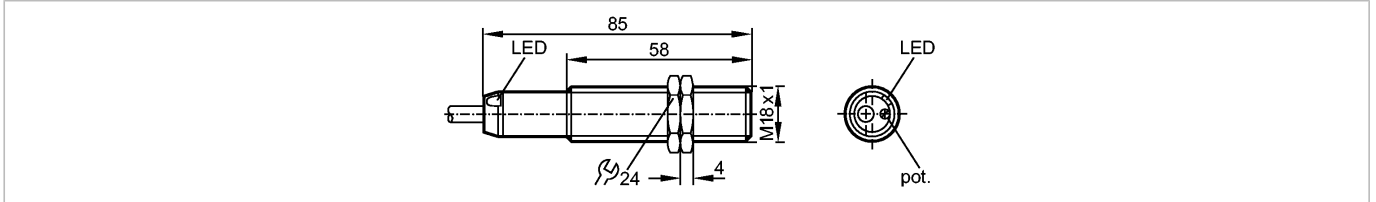

Product characteristics

Capacitive sensor

Plastic thread M18 x 1

Cable

Sensing range 8 mm; adjustable; [nfl] non-flush mountable

Electrical data

Electrical design

DC PNP/NPN

Operating voltage [V]

10...55 DC

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open / closed programmable

Voltage drop [V]

< 4.6

Minimum load current [mA]

4

Leakage current [mA]

< 0.6

Current rating [mA]

400

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

50

Monitoring range

Sensing range [mm]

8, adjustable

Real sensing range (Sr) [mm]

8 ± 10 %

Operating distance [mm]

0...6.5

Accuracy / deviations

Correction factors

water = 1 / glass approx. 0.4 / ceramics approx. 0.2 / PVC approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-15...15

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

Mechanical data

Mounting

non-flush mountable

Housing materials

PBT

Weight [kg]

0.155

Displays / operating elements

Output status indication LED

red

Electrical connection

Connection

PUR / PVC cable / 2 m; 2 x 0.5 mm²

Wiring

KG5016 - Capacitive sensor - eclass: 27270102 / 27-27-01-02

Core colors
BK black
WH white



Accessories

Accessories (included)

2 lock nuts; screwdriver

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — KG5016 — 06.03.2003
no longer available - archive entryreplaced by: KG5047