

no longer available - archive entry Alternative article: KI5207

When selecting an alternative article and accessories please note that technical data may differ!


efectoriso

KI5062



KI-3015-BPKG RT

Capacitive sensors

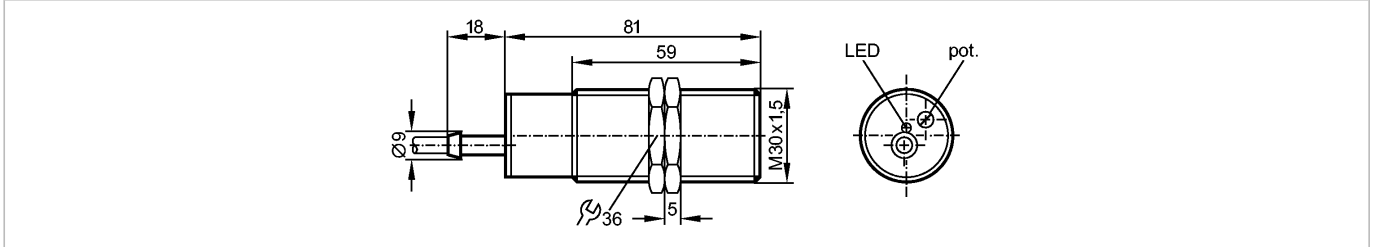

Product characteristics

Capacitive sensor

Plastic thread M30 x 1.5

Cable

Sensing range 15 mm; adjustable; [nf] non-flush mountable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...36 DC

Current consumption [mA]

10 (24 V)

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

40

Monitoring range

Sensing range [mm]

15, adjustable

Real sensing range (Sr) [mm]

15 ± 10 %

Operating distance [mm]

0...12.1

Accuracy / deviations

Correction factors

water = 1 / glass approx. 0.4 / ceramics approx. 0.2 / PVC approx. 0.2

Hysteresis [% of Sr]

1...15

Switch-point drift [% of Sr]

-15...15

Environment

Ambient temperature [°C]

-25...80

Protection

IP 65

Tests / approvals

EMC

EN 60947-5-2

Mechanical data

Mounting

non-flush mountable

Housing materials

PBT

Weight [kg]

0.2

Displays / operating elements

Output status indication LED

red

Electrical connection

Connection


PVC cable / 2 m; 3 x 0.5 mm²

Wiring

KI5062 - Capacitive sensor - eclass: 27270102 / 27-27-01-02

Core colors

BN brown
BU blue
BK black



Accessories

Accessories (included)

2 lock nuts; screwdriver

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — KI5062 — 07.04.2003

no longer available - archive entryAlternative article: KI5207

When selecting an alternative article and accessories please note that technical data may differ!