


no longer available - archive entry replaced by: KI5082
 Attention: the programming has changed!

efectoriso
 KN5122



KNM30NPKFNKG/US100

Capacitive sensors

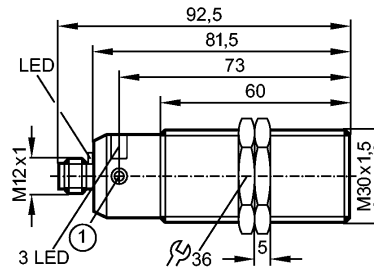

1: Programming button



Product characteristics

Level sensor

Plastic thread M30 x 1.5

Quick disconnect

Microprocessor

With remote calibration

Programmable sensing range; [nF] non-flush mountable

Application

Application For dry bulk material and liquids (detection through non-metallic vessel wall)

Electrical data

Electrical design

DC NPN

Operating voltage [V]

10...36 DC

Current consumption [mA]

30 (24 V)

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

normally open / closed programmable

Voltage drop

- Switching output [V]

< 2.5

- Function check output [V]

< 3.5

Current rating

- Switching output [mA]

250

- Function check output [mA]

10

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

5

Environment

Ambient temperature [°C]

-25...80

Medium temperature [°C]

-25...110

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

Mechanical data

Mounting

non-flush mountable

Housing materials

PBT; PP (polypropylene)

Weight [kg]

0.1

Displays / operating elements

Display


Switching status 2 x LED yellow

Power 1 x LED green

KN5122 - Level sensor - eclass: 27371813 / 27-37-18-13

Electrical connection	Marginal signal 1 x LED red
Connection	M12 connector

Wiring

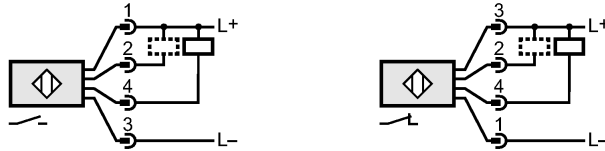

2: function check output / programming wire

Remarks	
Pack quantity	[piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — KN5122 — 21.07.2004
no longer available - archive entry replaced by: KI5082
Attention: the programming has changed!