

# Product data sheet


## Characteristics



# LA4DA2U

TeSys D - suppressor module - RC circuit - 110...240 V AC

Product availability : Stock - Normally stocked in distribution facility

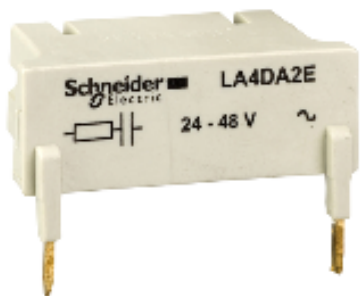

### Main

|                           |   |
|---------------------------|---|
| Range                     | TeSys   |
| Device short name         | LA4D  |
| Product or component type | Suppressor module                                 |
| Product compatibility     | LP1D400...D650<br>LC1D400...D650<br>LC1D80...D150 |

### Complementary

|                              |                          |
|------------------------------|--------------------------|
| Mounting mode                | By screws                |
| Suppressor technology        | RC circuit               |
| [Uc] control circuit voltage | 110...240 V AC <= 400 Hz |
| Maximum peak voltage         | 3 Uc                     |
| Product weight               | 0.04 lb(US) (0.018 kg)   |

### Environment

|                                       |                            |
|---------------------------------------|----------------------------|
| Ambient air temperature for operation | -13...131 °F (-25...55 °C) |
| Ambient air temperature for storage   | -40...176 °F (-40...80 °C) |

### Ordering and shipping details

|                       |                                 |
|-----------------------|---------------------------------|
| Category              | 22341 - CONTACTOR,D,K,&F ACCESS |
| Discount Schedule     | I12                             |
| GTIN                  | 00785901260011                  |
| Nbr. of units in pkg. | 1                               |
| Package weight(Lbs)   | 5.0000000000000003E-2           |
| Returnability         | Y                               |
| Country of origin     | FR                              |

Jul 31, 2017

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

## Contractual warranty

---

|                 |           |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

---