



Product availability : Stock - Normally stocked in distribution facility



### Main

Range of product	TeSys D
Range	TeSys
Product name	TeSys D
Product or component type	Reversing contactor
Device short name	LC2D
Contactor application	Resistive load Motor control
Utilisation category	AC-1 AC-3
Device presentation	Preassembled with reversing power busbar
Poles description	3P
Pole contact composition	3 NO
System Voltage	<= 300 V DC power circuit <= 690 V AC 25...400 Hz power circuit
[Ie] rated operational current	25 A (<= 140 °F (60 °C)) at <= 440 V AC AC-3 power circuit 40 A (<= 140 °F (60 °C)) at <= 440 V AC AC-1 power circuit
Motor power kW	11 kW at 380...400 V AC 50/60 Hz 15 kW at 500 V AC 50/60 Hz 15 kW at 660...690 V AC 50/60 Hz 5.5 kW at 220...230 V AC 50/60 Hz 11 kW at 415...440 V AC 50/60 Hz
Motor power hp	2 hp at 115 V AC 50/60 Hz 1 phase motors 3 hp at 230/240 V AC 50/60 Hz 1 phase motors 5 hp at 200/208 V AC 50/60 Hz 3 phases motors 7.5 hp at 230/240 V AC 50/60 Hz 3 phases motors 15 hp at 460/480 V AC 50/60 Hz 3 phases motors 20 hp at 575/600 V AC 50/60 Hz 3 phases motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	24 V AC 50/60 Hz
Auxiliary contact composition	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV conforming to IEC 60947

Overvoltage category	III
[Ith] conventional free air thermal current	40 A at <= 140 °F (60 °C) power circuit 10 A at <= 140 °F (60 °C) signalling circuit
Irms rated making capacity	450 A at 440 V power circuit conforming to IEC 60947 140 A AC signalling circuit conforming to IEC 60947-5-1 250 A DC signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	450 A at 440 V power circuit conforming to IEC 60947
[Icw] rated short-time withstand current	120 A <= 104 °F (40 °C) 1 min power circuit 240 A <= 104 °F (40 °C) 10 s power circuit 380 A <= 104 °F (40 °C) 1 s power circuit 50 A <= 104 °F (40 °C) 10 min power circuit 100 A 1 s signalling circuit 120 A 500 ms signalling circuit 140 A 100 ms signalling circuit
Associated fuse rating	40 A gG at <= 690 V coordination type 2 power circuit 63 A gG at <= 690 V coordination type 1 power circuit 10 A gG signalling circuit conforming to IEC 60947-5-1
Average impedance	2 mOhm at 50 Hz - Ith 40 A power circuit
[Ui] rated insulation voltage	600 V power circuit certifications CSA 600 V power circuit certifications UL 690 V power circuit conforming to IEC 60947-4-1 690 V signalling circuit conforming to IEC 60947-1 600 V signalling circuit certifications CSA 600 V signalling circuit certifications UL
Electrical durability	1.65 Mcycles 25 A AC-3 at Ue <= 440 V 1.4 Mcycles 40 A AC-1 at Ue <= 440 V
Power dissipation per pole	3.2 W AC-1 1.25 W AC-3
Protective cover	With
Interlocking type	Mechanical
Mounting support	Rail Plate
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508
Product certifications	CSA GOST LROS (Lloyds register of shipping) DNV CCC GL RINA BV UL
Connections - terminals	Control circuit: screw clamp terminals 2 cable(s) 0...0 in <sup>2</sup> (1...2.5 mm <sup>2</sup> ) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in <sup>2</sup> (1.5...10 mm <sup>2</sup> ) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible - without cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: flexible - with cable end Control circuit: screw clamp terminals 1 cable(s) 0...0.01 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid - without cable end Control circuit: screw clamp terminals 2 cable(s) 0...0.01 in <sup>2</sup> (1...4 mm <sup>2</sup> ) - cable stiffness: solid - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 2 cable(s) 0...0.02 in <sup>2</sup> (2.5...10 mm <sup>2</sup> ) - cable stiffness: flexible - without cable end Power circuit: screw clamp terminals 1 cable(s) 0...0.02 in <sup>2</sup> (1...10 mm <sup>2</sup> ) - cable stiffness: flexible - with cable end Power circuit: screw clamp terminals 2 cable(s) 0...0.01 in <sup>2</sup> (1.5...6 mm <sup>2</sup> ) - cable stiffness: flexible - with cable end

Power circuit: screw clamp terminals 2 cable(s) 0...0.02 in<sup>2</sup> (2.5...10 mm<sup>2</sup>) - cable stiffness: solid - without cable end

Tightening torque	Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Control circuit: 15.04 lbf.in (1.7 N.m) - on screw clamp terminals - with screwdriver Philips No 2 Power circuit: 22.12 lbf.in (2.5 N.m) - on screw clamp terminals - with screwdriver flat Ø 6 mm Power circuit: 22.12 lbf.in (2.5 N.m) - on screw clamp terminals - with screwdriver Philips No 2
Operating time	4...19 ms opening 12...22 ms closing
Safety reliability level	B10d = 1369863 cycles contactor with nominal load conforming to EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load conforming to EN/ISO 13849-1
Mechanical durability	15 Mcycles
Operating rate	3600 cyc/h at ≤ 140 °F (60 °C)

## Complementary

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 U <sub>c</sub> drop-out at 140 °F (60 °C), AC 50/60 Hz 0.8...1.1 U <sub>c</sub> operational at 140 °F (60 °C), AC 50 Hz 0.85...1.1 U <sub>c</sub> operational at 140 °F (60 °C), AC 60 Hz
Inrush power in VA	70 VA at 68 °F (20 °C) (cos φ 0.75) 60 Hz 70 VA at 68 °F (20 °C) (cos φ 0.75) 50 Hz
Hold-in power consumption in VA	7.5 VA at 68 °F (20 °C) (cos φ 0.3) 60 Hz 7 VA at 68 °F (20 °C) (cos φ 0.3) 50 Hz
Heat dissipation	2...3 W at 50/60 Hz
Auxiliary contacts type	Type mechanically linked (1 NO + 1 NC) conforming to IEC 60947-5-1 Type mirror contact (1 NC) conforming to IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA signalling circuit
Minimum switching voltage	17 V Signalling circuit
Non-overlap time	1.5 ms on de-energisation (between NC and NO contact) 1.5 ms on energisation (between NC and NO contact)
Insulation resistance	> 10 MOhm signalling circuit
Power range	7...11 kW 380...440 V 3 phases 7...11 kW 480...500 V 3 phases 4...6 kW 200...240 V 3 phases
Motor starter type	Reversing contactor
Contactor coil voltage	24 V AC standard

## Environment

IP degree of protection	IP20 front face conforming to IEC 60529
Protective treatment	TH conforming to IEC 60068-2-30
Pollution degree	3
Ambient air temperature for operation	-4...140 °F (-20...60 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Permissible ambient air temperature around the device	-40...158 °F (-40...70 °C) at U <sub>c</sub>
Operating altitude	9842.52 ft (3000 m) without derating in temperature
Fire resistance	1562 °F (850 °C) conforming to IEC 60695-2-1
Flame retardance	V1 conforming to UL 94
Mechanical robustness	Vibrations contactor open 2 Gn, 5...300 Hz Vibrations contactor closed 4 Gn, 5...300 Hz Shocks contactor closed 15 Gn for 11 ms Shocks contactor open 8 Gn for 11 ms
Height	3.35 in (85 mm)
Width	3.54 in (90 mm)
Depth	3.62 in (92 mm)
Product weight	1.74 lb(US) (0.787 kg)

### Ordering and shipping details

Category	22346 - CTR,D-LINE,OPEN,REVERSING-NEW
Discount Schedule	I12
GTIN	00785901207498
Nbr. of units in pkg.	1
Package weight(Lbs)	2.0899999999999999
Returnability	Y
Country of origin	ID


### Offer Sustainability

Sustainable offer status	Green Premium product
RoHS (date code: YYWW)	Compliant - since 0627 - Schneider Electric declaration of conformity <a href="#">Schneider Electric declaration of conformity</a>
REACH	Reference not containing SVHC above the threshold <a href="#">Reference not containing SVHC above the threshold</a>
Product environmental profile	Available
Product end of life instructions	Available

### Contractual warranty

Warranty period	18 months
-----------------	-----------

Dimensions

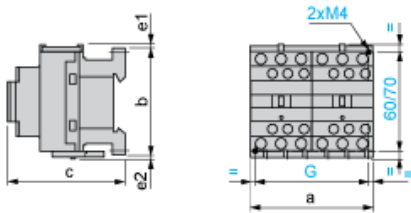


LC2 or 2 x LC1	a	b	c <sup>(1)</sup>	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	–	–	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	–	–	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	–	–	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	–	–	80





e1 and e2: including cabling.

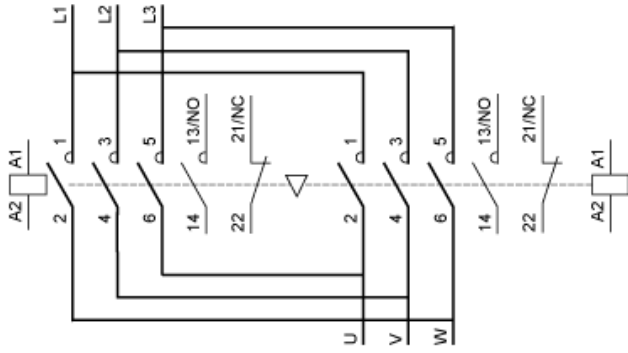(1) With safety cover, without add-on block.

Wiring



Our Proposal - Type 1 : Circuit Breaker + Contactor for Motor Power from 9 to 11 kW and 415 VAC

Motor Power (kW)	Icu (kA)	Breaker	Contactor
9	15	 GV2ME21	 LC2D25B7
11	15	 GV2ME22	 LC2D25B7

Non contractual pictures. Type 1 coordination requires that in a short-circuit condition, the contactor or starter must not present any danger to personnel or installations and must not be able to resume operation without repair or the replacement of parts.