

no longer available - archive entry


**efector120**

MK5055



MKN3000-BPKG

Magnetic sensors, cylinder sensors

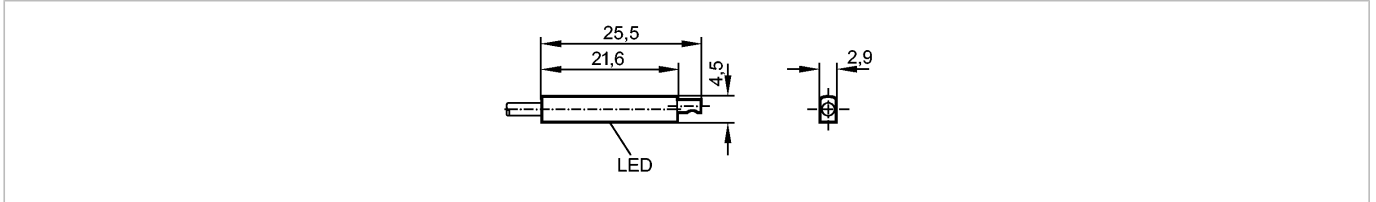

Product characteristics

Cylinder sensor

Plastic housing for C-slot cylinders

Cable

Magnetic sensitivity 2.5 mT

Travel speed max. 5 m/s

Active face at the front

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...30 DC

Current consumption [mA]

< 12

Reverse polarity protection

yes

Outputs

Output function

normally open

Voltage drop [V]

< 3.1

Current rating [mA]

100

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

10000

Monitoring range

Magnetic sensitivity [mT]

2.5

Travel speed [m/s]

max. 5

Accuracy / deviations

Hysteresis [mm]

1...2

Repeatability [mm]

0.1

Reaction times

Power-on delay time [ms]

< 1

Environment

Ambient temperature [°C]

-25...70

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

Shock / vibration resistance

30 g (11 ms) / 10-55 Hz (1 mm)

MTTF [Years]

1290

Mechanical data

sensing face

Active face at the front

Housing materials

LCP

Weight [kg]

0.024

Displays / operating elements

Output status indication LED

yellow

Electrical connection

Connection


PUR cable / 2 m; 3 x 0.06 mm<sup>2</sup>

**Wiring**

# MK5055 - Cylinder sensor - eclass: 27270104 / 27-27-01-04

## Core colors

BK black  
BN brown  
BU blue



## Remarks

Pack quantity [piece] 1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — MK5055 — 06.03.2003  
no longer available - archive entry