



Model Number

NBB10-30GM60-AAR-Y906216

Inductive sensor

Features

- SPDT Relay Output
- Sensing range 10 mm
- Active 24 V DC Relay Output

Accessories

BF 30

Mounting flange, 30 mm

AB-30

Mounting aid

Technical Data

General specifications

Switching element function		SPDT Relay
Rated operating distance	s_n	10 mm
Installation		flush
Output polarity		DC
Reduction factor r_{AI}		0.4
Reduction factor r_{CU}		0.3
Reduction factor r_{304}		0.85
Mechanical life		No load: 2×10^7 operations Full load: 1×10^5 switching cycles

Nominal ratings

Operating voltage	U_B	10 ... 30 V DC
-------------------	-------	----------------

Hysteresis	H	approx. 10 %
Operating current	I_L	≤ 50 mA
Switching state indication		LED, yellow

Output

Switching voltage		max 28 V DC
Switching current		max 6 A DC resistive load
Switching power		max 180 W

Ambient conditions

Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
---------------------	--	--------------------------------


Mechanical specifications

Connection type		1 m, PUR cable, heavy jacket, 4-conductor, # 18 AWG
Core cross-section		0.75 mm ²
Housing material		brass, nickel-plated
Sensing face		PBT
Protection degree		IP67

Approvals and certificates

UL approval		cULus Listed, General Purpose
CSA approval		cCSAus Listed, General Purpose

Dimensions

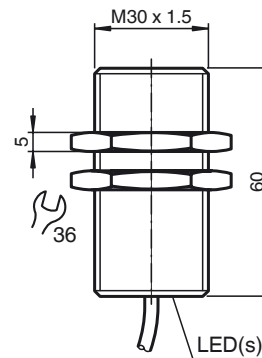

Electrical Connection

AAR

