

1: selection switch, pot's (under cover)

Receiver in upper lens, transmitter in lower lens



Product characteristics

Diffuse reflection sensor

Rectangular, plastics

Terminals

Range 5...1500mm (referred to white paper 200 x 200 mm)
adjustable

Electrical data

Electrical design

AC/DC relay

Operating voltage [V]

20...250 AC/DC (47...63 Hz AC)

Power consumption [VA]

< 2

Type of light

Infrared light 880 nm

Protection class

II

Reverse polarity protection

no

Outputs

Output function

light-on / dark-on programmable

Contact rating

250 V AC / 3 A / 360 VA, 125 V DC / 3 A / 30 W

Short-circuit proof

no

Overload protection

no

Switching frequency [Hz]

10

Monitoring range


Range [mm]

5...1500 (referred to white paper 200 x 200 mm)

Light spot diameter [mm]


370 (at maximum range)

Excess gain graphs

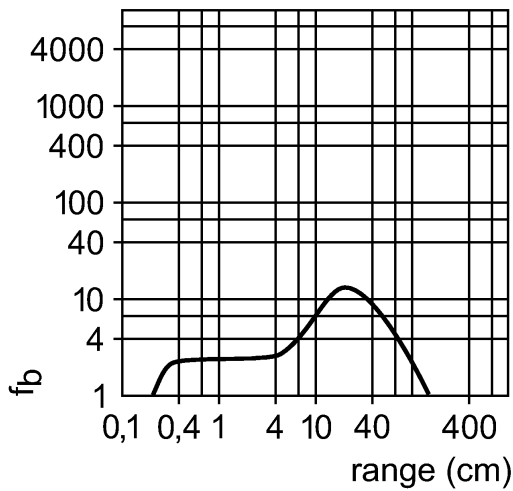

Environment	
Ambient temperature [°C]	-25...60
Protection	IP 65
Tests / approvals	
EMC	EN 60947-5-2
MTTF [Years]	288
Mechanical data	
Housing materials	modified PPO
Lens material	PMMA
Weight [kg]	0.303
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	terminals up to 1.5 mm ² ; cable diameter 4.5...10 mm, cable gland M16 x 1.5

Wiring



Note: miniature fuse to IEC60127-2 sheet 1, ≤ 5 A (fast acting)

Accessories	
Accessories (included)	Angle bracket; E20514; screwdriver
Remarks	
Remarks	Recommendation: check the unit for reliable function after a short circuit.
Pack quantity [piece]	1