no longer available - archive entryAlternative article: OF5062
When selecting an alternative article and accessories please note that technical data may differ!

efector200

OF5061

OFP-FNKG

Photoelectric sensors



Product characteristics

Retro-reflective sensor	
Threaded type	
M12 x 1	
Cable	
Polarization filter	
Sensing range 0.2...0.8m (Prismatic reflector Ø 80 (E20005))	

Electrical data

Electrical design		DC NPN
Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 30
Type of light		red light 660 nm
Protection class		II
Reverse polarity protection		yes

Outputs

Output function		light-on / dark-on programmable
Voltage drop	[V]	< 2.5
Current rating	[mA]	200
Short-circuit protection		yes (non-latching)
Overload protection		yes
Switching frequency	[Hz]	320

Monitoring range

Sensing range	[m]	0.2...0.8 (Prismatic reflector Ø 80 (E20005))
Range referred to prismatic reflector	[m]	Ø 80 0.2...0.8 Ø 35 0.2...0.5 Ø 20 -
Light spot diameter	[mm]	70 (at maximum range)

Excess gain graphs

OF5061 - Retro-reflective sensor - eclass: 27270902 / 27-27-09-02

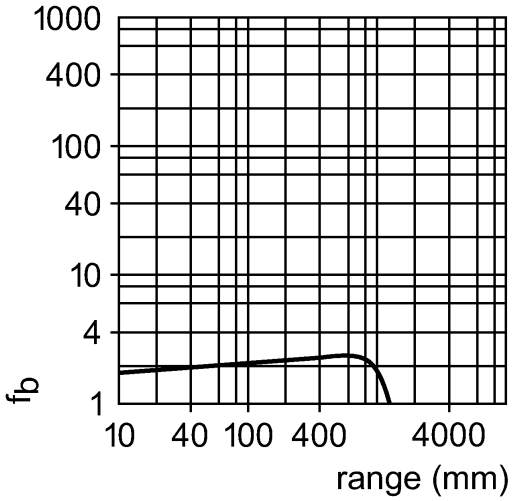

Environment		
Ambient temperature	[°C]	-25...60
Protection		IP 67
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[Years]	907
Mechanical data		
Housing materials		brass nickel-plated
Lens material		PMMA
Weight	[kg]	0.091
Displays / operating elements		
Output status indication	LED	yellow
Power	LED	green
Electrical connection		
Connection		PUR cable / 2 m; 3 x 0.34 mm²

Wiring

Core colors

BN brown
BU blue
BK black





Accessories		
Accessories (included)		2 lock nuts
Remarks		
Pack quantity	[piece]	1

no longer available - archive entryAlternative article: OF5062

When selecting an alternative article and accessories please note that technical data may differ!