

no longer available - archive entry Alternative article: OG5106

When selecting an alternative article and accessories please note that technical data may differ!


efector200

OG5012



OGR-DPKG

Photoelectric sensors

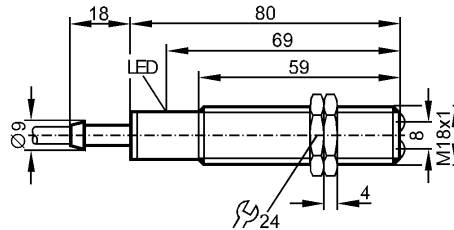

Product characteristics

Retro-reflective sensor

Threaded type

M18 x 1

Cable

Sensing range 3m (Prismatic reflector Ø 80 (E20005))

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...55 DC

Current consumption [mA]

10 (24 V)

Type of light

Infrared light 880 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

dark-on mode

Voltage drop [V]

< 2.5

Current rating [mA]

250

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

160

Monitoring range

Sensing range [m]

3 (Prismatic reflector Ø 80 (E20005))

Environment

Ambient temperature [°C]

-25...80

Protection

IP 67

Tests / approvals

EMC

EN 60947-5-2

EN 55011:

class B

Mechanical data

Housing materials

brass nickel-plated

Lens material

glass

Weight [kg]

0.19

Displays / operating elements

Output status indication LED

yellow

Electrical connection

Connection

PVC cable / 2 m; 3 x 0.5 mm²

OG5012 - Retro-reflective sensor - eclass: 27270902 / 27-27-09-02


Wiring

Core colors

BN brown

BU blue

BK black



Accessories

Accessories (included)

2 lock nuts

Remarks

Pack quantity

[piece]

1

ifm efector, inc. • 1100 Atwater Drive • Malvern • PA 19355 — We reserve the right to make technical alterations without prior notice. — US — OG5012 — 06.03.2003

no longer available - archive entryAlternative article: OG5106

When selecting an alternative article and accessories please note that technical data may differ!