

no longer available - archive entry replaced by: OGE502


efector200

OG5041



OGE-FPKG

Photoelectric sensors



1: pushbutton



Product characteristics

Through-beam sensor

Threaded type

M18 x 1

Cable

Receiver

Sensing range 15m

adjustable

Electrical data

Electrical design

DC PNP

Operating voltage [V]

10...36 DC

Current consumption [mA]

< 22

Type of light

Infrared light 880 nm

Protection class

II

Reverse polarity protection

yes

Outputs

Output function

light-on / dark-on programmable

Voltage drop [V]

< 2.5

Current rating [mA]

200

Short-circuit protection

yes (non-latching)

Overload protection

yes

Switching frequency [Hz]

500


Monitoring range

Sensing range [m]

15

Excess gain graphs

OG5041 - Through-beam sensor - eclass: 27270901 / 27-27-09-01

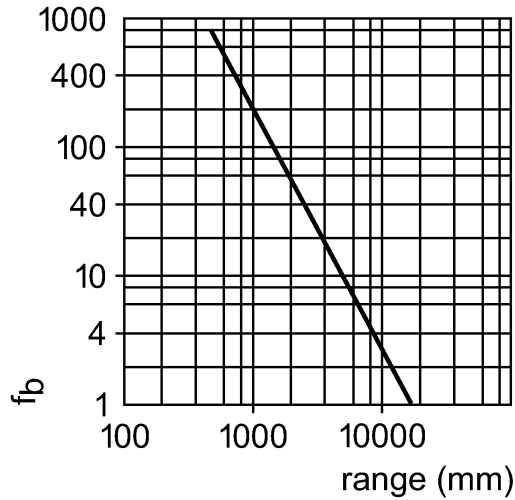


Environment	
Ambient temperature [°C]	-25...80
Protection	IP 67
Tests / approvals	
EMC	EN 60947-5-2 EN 55011: class B
Mechanical data	
Housing materials	PBT (Pocan)
Lens material	PMMA
Weight [kg]	0.128
Displays / operating elements	
Output status indication LED	yellow
Power LED	green
Function display LED	red
Electrical connection	
Connection	PVC cable / 2 m; 3 x 0.34 mm ²

Wiring

Core colors

- BN brown
- BU blue
- BK black



Accessories	
Accessories (included)	2 lock nuts
Remarks	
Remarks	cULus - Class 2 source required
Pack quantity [piece]	1